Ontario Geological Survey
Aggregate Resources Inventory Paper 56

AGGREGATE RESOURCES INVENTORY OF FLOS TOWNSHIP Simcoe County SOUTHERN ONTARIO

by
Staff of the Engineering and Terrain Geology Section
Ontario Geological Survey

1982

Ontario
Ministry of Natural Resources
Hon. Alan W. Pope
Minister
W. T. Foster
Deputy Minister

© OMNR-OGS 1982

Publications of the Ontario Ministry of Natural Resources
and price list
are obtainable through the
Ontario Ministry of Natural Resources, Map Unit, Public Service Centre
Queen's Park, Toronto, Ontario
and
The Ontario Government Bookstore
880 Bay Street, Toronto, Ontario

Orders for publications should be accompanied by cheque
or money order, payable to the Treasurer of Ontario

ISSN 0708-2061
ISBN 0-7743-6003-8

This report was prepared by: Staff of the Aggregate Assessment Office, Engineering and Terrain Geology Section of the Ontario Geological Survey, Ontario Ministry of Natural Resources, 77 Grenville Street, Toronto, M5S 1B3, Telephone (416) 965-1182.

Project Supervisor: Dale W. Scott
Text Prepared by: I. Szoke
Compilation and Drafting by: Staff of the Aggregate Assessment Office

The Mineral Resources Staff of Huronia District, Central Region of the Ministry of Natural Resources assisted in the collection of data, field checking and review of this report.

Parts of this publication may be quoted if credit is given to the Ontario Ministry of Natural Resources, Ontario Geological Survey. It is recommended that reference to this report be made in the following form:

Ontario Geological Survey
1982: Aggregate Resources Inventory of Flos Township, Simcoe County; Ontario Geological Survey, Aggregate Resources Inventory Paper 56, 33 p., 7 tables, 3 maps, scale 1:50 000.

Every possible effort is made to insure the accuracy of the information contained in this report, but the Ministry of Natural Resources does not assume any liability for errors that may occur. Source references are included in the report and users may wish to verify critical information.

500-81-Carswell

CONTENTS

Page

Abstract v
Introduction 1
Part I - Inventory Methods 2
Field and Office Methods 2
Resource Tonnage Calculation Techniques 2
Sand and Gravel Resources 2
Bedrock Resources 3
Units and Definitions 3
Part II - Data Presentation and Interpretation 4
Map 1 Distribution of Sand and Gravel Deposits 4
Deposit Symbol 4
Texture Symbol 4
Map 2 Selected Sand and Gravel Resource Areas 5
Site Specific Criteria 5
Deposit Size 5
Aggregate Quality 5
Location and Setting 6
Regional Considerations 7
Map 3 Bedrock Resources 7
Selection Criteria 7
Selected Resource Areas 8
Part III - Assessment of Aggregate Resources in Flos Township 9
Location and Population 9
Physiography and Surficial Geology 9
Extractive Activity 10
Selected Sand and Gravel Resource Areas 11
Selected Sand and Gravel Resource Area 1 11
Selected Sand and Gravel Resource Area 2 11
Selected Sand and Gravel Resource Area 3 12
Sand and Gravel Resource Areas of Secondary Significance 12
Bedrock Geology 12
Summary 13
References 22
Appendix A - Suggested Additional Reading 24
Appendix B - Glossary 25
Appendix C - Geology of Sand and Gravel Deposits 26
Appendix D - Geology of Bedrock Deposits 30

TABLES

1 - Total Sand and Gravel Resources, Flos Township 14
2 - Sand and Gravel Pits, Flos Township 15
3 - Selected Sand and Gravel Resource Areas, Flos Township 16
4 - Total Identified Bedrock Resources, Flos Township 18
5 - Quarries, Flos Township 19
6 - Selected Bedrock Resource Areas, Flos Township 20
7 - Summary of Test Hole Data, Flos Township 21

FIGURES

1 - Key Map Showing Location of Flos Township v
2 - Bedrock Geology of Southern Ontario 30

MAPS
(back pocket)

1 - Distribution of Sand and Gravel Deposits, Flos Township, Scale 1:50 000.
2 - Selected Sand and Gravel Resource Areas, Flos Township, Scale 1:50 000.
3 - Bedrock Resources, Flos Township, Scale 1:50 000.

ABSTRACT

Figure 1 - Key Map Showing Location of Flos Township, Scale 1:1 800 000.

This report includes both an inventory and evaluation of sand and gravel as well as bedrock resources in Flos Township. The report is part of the Aggregate Resources Inventory Program for townships and municipalities designated under The Pits and Quarries Control Act, 1971.

In Flos Township, three areas containing significant amounts of sand and gravel have been selected for possible resource protection. Selected Sand and Gravel Resource Areas occupy 3000 acres (1210 ha), exclusive of licenced properties. An estimated 2350 acres (950 ha) are currently available for extraction, containing possible resources of 144 million tons (131 million tonnes). The parts of the Selected Areas which are available for extraction represent 9 percent of the total area occupied by sand and gravel deposits in the township and 16 percent of the total resource tonnage.

Selected Sand and Gravel Resource Area 1 is a glaciofluvial outwash deposit located southwest of Phelpston; it is the most important natural aggregate deposit in the township and contains approximately 138 million tons (125 million tonnes) of sand and crushable gravel suitable for a wide range of road-building and construction uses.

Selected Sand and Gravel Resource Area 2 is a glaciolacustrine beach deposit located northwest of Orr Lake. The Area contains approximately 4 million tons (4 million tonnes) of material suitable for crusher-run and pit-run gravel production.

Selected Sand and Gravel Resource Area 3 is a glaciofluvial outwash deposit located southwest of Phelpston. The Area contains approximately 2 million tons (2 million tonnes) of granular material.

Flos Township has possible sand and gravel resources which should be sufficient for local needs in the forseeable future. Care should be taken to ensure the continuing availability of as much of the remaining resources as possible.

Bedrock of the Bobcaygeon and Verulam Formations subcrops within the township. However, the great thickness of overburden overlying the bedrock prohibits economic quarrying.

Selected Resource Areas are not intended to be permanent, single land use units which must be incorporated in an official planning document. They represent areas in which a major resource is known to exist. Such Resource Areas may be reserved wholly or partially for extractive development and/or resource protection within the context of the official plan.

AGGREGATE RESOURCES INVENTORY OF FLOS TOWNSHIP[1]

BY
STAFF OF THE ENGINEERING
AND TERRAIN GEOLOGY SECTION

INTRODUCTION

Mineral aggregates, which include bedrock-derived crushed stone as well as naturally formed sand and gravel, constitute the major raw material in Ontario's road-building and construction industries. Very large amounts of these materials are used each year throughout the Province. For example, in 1979, the total tonnage of mineral aggregates extracted was 144 million tons (131 million tonnes), greater than that of any other metallic or nonmetallic commodity mined in the Province (Ontario Ministry of Natural Resources 1980).

Although mineral aggregate deposits are plentiful in southern Ontario, they are fixed-location, nonrenewable resources which can be exploited only in those areas where they occur. Mineral aggregates are characterized by their high bulk and low unit value so that the economic value of a deposit is a function of its proximity to a market area as well as its quality and size. The potential for extractive development is usually greatest in urban fringe areas where land use competition is extreme. For these reasons the availability of adequate resources for future development is now being threatened in some areas.

Comprehensive planning and resource management strategies are required to make the best use of available resources, especially in those areas experiencing rapid development. Such strategies must be based on a sound knowledge of the total mineral aggregate resource base at both local and regional levels. The purpose of the Aggregate Resources Inventory is to provide the basic geological information required to include potential mineral aggregate resource areas in planning strategies and official plans. The reports should form the basis for discussion on those areas best suited for possible extraction. The aim is to assist decision-makers in protecting the public well-being by ensuring that adequate resources of mineral aggregate remain available for future use.

This report is a technical background document, based for the most part on geological information and interpretation. It has been designed as a component of the total planning process and should be used in conjunction with other planning considerations, to ensure the best use of a municipality's resources.

The report includes an assessment of sand, gravel and crushed bedrock. The most recent information available has been used to prepare the reports. As new information becomes available, revisions may be necessary.

[1] Manuscript accepted for publication by Chief, Engineering and Terrain Geology Section, November 10, 1981.
This paper is published with the permission of E.G. Pye, Director, Ontario Geological Survey.

PART I - INVENTORY METHODS

FIELD AND OFFICE METHODS

The methods used to prepare the report primarily involve the interpretation of published geological data such as bedrock and surficial geology maps and reports (see References). Field methods included the examination of natural and man-made exposures of granular material. Most observations were made at quarries and sand and gravel pits located from records held by the Ontario Ministry of Transportation and Communications, the Ontario Geological Survey, and by Regional and District Offices of the Ontario Ministry of Natural Resources. Observations made at pit sites included estimates of the total face height and the proportion of gravel- and sand-sized fragments in the deposit. Observations were also made of the shape and lithology of the particles. These characteristics are important in estimating the quality and quantity of the aggregate. In areas of limited exposure, test pitting, soil probing and hand-augering techniques were used to assess subsurface materials. Airphotos at various scales were used to determine the continuity of deposits, especially in areas of limited subsurface information.

Deposits with potential for further extractive development or those where existing data are scarce, were studied in greater detail. Representative layers in these deposits were sampled in 25- to 100-pound (11 to 45 kg) units either from existing pit faces or from test pits dug by backhoe. The samples were analysed for grain size distribution and in some cases for petrographic assemblage. Analyses were performed by the laboratories of the Soils and Aggregates Section, Engineering Materials Office, Ontario Ministry of Transportation and Communications. In areas of limited subsurface exposure, drilling using a powered hollow stem auger was undertaken. The stratigraphic sections in these test holes are described in drill logs included in the report as Table 7. In some cases samples taken during the course of the drilling were analysed to determine grain size distribution. The symbols for and locations of test hole sites are noted on Map 1.

In the office, the pit and field sample data were supplemented by information on file with the Soils and Aggregates Section of the Ontario Ministry of Transportation and Communications. Data contained in these files include field estimates of the depth, composition and "workability" of deposits as well as laboratory analyses of the physical properties and chemical suitability of the aggregate. Information concerning the development history of the pits and acceptable uses of the aggregate is also recorded. The location, size, and depth of extraction of pits licenced under The Pits and Quarries Control Act, 1971 were obtained from records held by Regional and District Offices of the Ontario Ministry of Natural Resources. The cooperation of the above named groups in the compilation of inventory data is gratefully acknowledged.

Water well records, held by the Ontario Ministry of the Environment, were used in some areas to corroborate thickness estimates, or to indicate the presence of buried granular material. These records were used only in conjunction with other evidence. Soil reports published by the Ontario Ministry of Agriculture and Food were also consulted in order to supply additional information in areas with limited data. Topographic maps of the National Topographic System, at a scale of 1:50 000, were used as a compilation base for the field and office data. The information was then transferred to a township base map, also at a scale of 1:50 000, prepared by the Cartography Section of the Lands and Waters Group, Ontario Ministry of Natural Resources, for presentation in the report.

RESOURCE TONNAGE CALCULATION TECHNIQUES

SAND AND GRAVEL RESOURCES

Once the interpretative boundaries of the aggregate units have been drawn, quantitative estimates of the possible resources available can be made. Generally, the volume of a deposit can be calculated if its areal extent and average thickness are known or can be estimated. The computation methods used are as follows. First, the area of the deposit, as outlined on the final base map, is calculated in acres. The thickness values used are an approximation of the deposit thickness, based on the face heights of pits developed in the deposit or on subsurface data

such as test holes and water well logs. Original tonnage values can then be calculated by multiplying the volume of the deposit by 2500 (the density factor). This factor is approximately the number of tons in a one-foot (0.3 m) thick layer of sand and gravel, one acre (0.4 ha) in extent, assuming an average density of 110 pounds per cubic foot (1766 kg per cubic metre).

Tonnage = Area x Thickness x Density Factor

Tonnage calculated in this manner must be considered only as an estimate. Furthermore, such tonnages represent amounts that existed prior to any extraction of material (i.e. original tonnage) (Table 1, Column 4).

The Selected Sand and Gravel Resource Areas in Table 3 represent only those parts of the deposit lying outside licenced areas (Column 2). Two successive subtractions are made from the unlicenced area. Column 3 accounts for the number of acres unavailable due to the presence of permanent cultural features and their associated setback requirements. Column 4 accounts for those areas lying outside of licenced properties that have previously been extracted (e.g. wayside pits are included in this category). The remaining figure is the area of the deposit currently available for extraction (Column 5). The available area is then multiplied by the estimated deposit thickness and the density factor (Column 5 x Column 6 x 2500) to give an estimate of the sand and gravel tonnage (Column 7) presently available for extractive development and/or resource protection.

BEDROCK RESOURCES

The method used to calculate resources of bedrock-derived aggregate is much the same as that described above. The areal extent of favorable bedrock formations overlain by less than 50 feet (15 m) of unconsolidated overburden is determined from bedrock geology maps, drift thickness and bedrock topography maps and from the interpretation of water well records. The measured extent of such areas is then multiplied by the estimated workable thickness of the formation, based on stratigraphic analyses and on estimates of existing quarry faces in the unit. In some cases a standardized estimate of a workable thickness of 60 feet (18 m) is used. Volume estimates are then multiplied by 3600 (the estimated weight in tons of a one-foot (0.3 m) thick section of dolostone, one acre (0.4 ha) in extent, assuming a bulk density of 165 pounds per cubic foot (2649 kg per cubic metre)).

Resources of sandstone are calculated using a bulk density estimate of 146 pounds per cubic foot (2344 kg per cubic metre) or approximately 3200 tons per acre (7173 tonnes per hectare). Shale resources are calculated on the basis of a bulk density estimate of 150 pounds per cubic foot (2408 kg per cubic metre).

UNITS AND DEFINITIONS

Although most of the measurements and other primary data available for resource tonnage calculations are given in Imperial units, Metric units have also been given in the text and on the tables which accompany the report. The Metric equivalent of the data is shown in brackets after or directly below the corresponding Imperial figures. Data are generally rounded off in accordance with the Ontario Metric Practice Guide (Metric Committee 1975).

The tonnage estimates made for sand and gravel as well as bedrock-derived aggregates are termed possible resources in accordance with terminology of the Ontario Resource Classification Scheme (Robertson 1975, p. 7) and with the Association of Professional Engineers of Ontario (1976) (see Glossary, Appendix B).

PART II - DATA PRESENTATION AND INTERPRETATION

Three maps, each portraying a different aspect of the aggregate resources in the municipality, accompany the report. Map 1, "Distribution of Sand and Gravel Deposits", gives a comprehensive inventory of the sand and gravel resources in the report area. Map 2, "Selected Sand and Gravel Resource Areas", shows those deposits which are considered to represent the largest and/or highest quality resources in the area. Map 3, "Bedrock Resources", shows the distribution of bedrock formations, the thickness of overlying unconsolidated sediments, and identifies the Selected Bedrock Resource Areas.

MAP 1: DISTRIBUTION OF SAND AND GRAVEL DEPOSITS

Map 1 is derived directly from the existing surficial geology maps of the area or from airphoto and field interpretation where surficial mapping is incomplete. It shows the extent and quality of sand and gravel deposits within the study area and the present level of extractive activity.

The present level of extractive activity in the study area is indicated as follows. Those areas which are licenced for extraction under The Pits and Quarries Control Act, 1971 are shown by a solid outline and identified by a number which refers to the pit descriptions in Table 2. Each description notes the owner, location and licenced acreage of the pit, as well as the estimated face height and percentage gravel. A number of unlicenced pits (abandoned pits or wayside pits operating on demand under authority of a permit) are also identified and numbered on Map 1 and described in Table 2.

Map 1 also presents a summary of available information related to the quality of aggregate contained in all the known aggregate deposits in the study area. Much of this information is contained in the symbols which are found on the map. The Deposit Symbol appears for each mapped deposit and summarizes important genetic and textural data. The Texture Symbol is a circular proportional diagram which displays the grain size distribution of the aggregate in areas where bulk samples were taken.

DEPOSIT SYMBOL

The Deposit Symbol is similar to those used in soil mapping and land classification systems commonly in use in North America. The components of the symbol indicate the gravel content, thickness of material, origin (type), and quality limitations for a given deposit. These components are illustrated by the following example:



This symbol identifies an outwash deposit 10 to 20 feet (3 to 6 m) thick containing more than 35 percent gravel. Excess silt and clay may limit uses of the aggregate in the deposit.

The "gravel content" and "thickness class" are basic criteria for distinguishing different deposits. The "gravel content" symbol is an upper case "S" or "G". The "S" indicates that the deposit is generally "sandy" and that gravel-sized aggregate (greater than 4.75 mm) makes up less than 35 percent of the whole deposit. "G" indicates that the aggregate probably contains more than 35 percent gravel.

The "thickness class" indicates a depth range which is related to the potential resource tonnage for each deposit. Four thickness class divisions have been established as shown in the legend for Map 1.

Two smaller sets of letters, divided from each other by a horizontal line, follow the thickness class number. The upper series of letters identify the geologic deposit type (the types are summarized with respect to their main geologic and extractive characteristics in Appendix C) and the lower series of letters identify the main quality limitations that may be present in the deposit, as discussed in the next section.

TEXTURE SYMBOL

The Texture Symbol provides a more detailed assessment of the grain size distribution in deposits where samples were taken for analysis during field study. The data from which these symbols are derived has been plotted on grain size distribution graphs. The relative amounts of gravel, sand, silt, and clay in the sampled material are shown graphically by the sub-

division of a circle into proportional segments. The following example shows a hypothetical sample consisting of 30 percent gravel, 60 percent sand, and 10 percent silt and clay:

Test hole locations are shown on Map 1 by a solid drill hole symbol.

MAP 2: SELECTED SAND AND GRAVEL RESOURCE AREAS

Map 2 is an interpretative map derived from an evaluation of the deposits shown on Map 1. The deposits identified on Map 2 are those which are considered to be important in ensuring an adequate resource base for the future.

All the selected sand and gravel resource areas are first delineated by geological boundaries and then classified into three levels of significance: primary; secondary; and tertiary. These areas are identified on Map 2 by different shading patterns. Each area of primary significance is assessed as to its probable relative value as a resource in the municipality and is given a deposit number which denotes its ranking order. All such deposits are shown by a dark shading on Map 2.

Selected Sand and Gravel Resource Areas of primary significance are not permanent, single land use units which must be incorporated in an official planning document. They represent areas in which a major resource is known to exist. Such Resource Areas may be reserved wholly or partially for extractive development and/or resource protection within the context of the official plan.

Deposits of secondary significance are not ranked numerically in this report, but are indicated by a light shading on Map 2. Such deposits are believed to contain significant amounts of sand and gravel. Although deposits of secondary significance are not considered to be the "best" resource areas in a municipality, they may contain large quantities of sand and gravel and should be considered an integral component of the aggregate supply of the municipality.

Areas of tertiary significance are indicated on the map by a dashed line but have no shading. They are neither rated nor considered to be important resource areas because of their low available resources, or because of possible difficulties in extraction. Such areas may be useful for local needs but are unlikely to support large-scale development.

The process by which deposits are evaluated and selected involves the consideration of two sets of criteria. The main selection criteria are site specific, related to the characteristics of individual deposits. Factors such as deposit size, aggregate quality, and deposit location and setting are considered in the selection of those deposits best suited for extractive development. A second set of criteria involves the assessment of local aggregate resources in relation to the quality, quantity, and distribution of resources in the region in which the municipality is located. The intent of such a process of evaluation is to ensure the continuing availability of sufficient resources to meet possible future demands.

SITE SPECIFIC CRITERIA

DEPOSIT SIZE

Ideally, selected deposits should contain available sand and gravel resources large enough to support a commercial pit operation using a stationary or portable processing plant. In practice, much smaller deposits may be of significant value depending on the overall reserves in the rest of the municipality. Generally, deposits in Class 1, i.e. those thicker than 20 feet (6m) and containing more than 35 percent crushable gravel are considered to be most favourable for commercial development. Thinner deposits may be valuable in municipalities with low total resources.

AGGREGATE QUALITY

The limitations of natural aggregates for various uses result from variations in the lithology of the particles composing the deposit, and from variations in the size distribution of these particles.

Four indicators of the quality of aggregate may be included in the symbol for each deposit on Map 1. They are: gravel content (G or S); fines (C); oversize (O); and lithology (L).

Three of the indicators deal with grain size distribution. The gravel content (G or S) indi-

cates the suitability of aggregate for various uses. Deposits containing at least 35 percent gravel in addition to a minimum of 20 percent material greater than the 26.5 mm sieve are considered to be the most favourable extractive sites, since this content is the minimum from which crushed products can be economically produced.

Excess fines (or high silt and clay content) may severely limit the potential use of an aggregate. Fines content in excess of 10 percent may impede drainage in road sub-base aggregate and render it more susceptible to the effects of frost action. In asphaltic aggregate, excess fines hinder the bonding of particles. Deposits known to have a high fines content are indicated by a "C" in the quality portion of the Deposit Symbol.

Deposits containing more than 20 percent oversize material (greater than 4 inches (10 cm) in diameter) may also have use limitations. The oversize component is unacceptable for all concrete aggregate and for road-building aggregate, so it must be either crushed or removed during processing. Deposits known to have an appreciable oversize component are indicated by an "O" in the quality portion of the Deposit Symbol.

The other indicator of the quality of an aggregate is lithology. Just as the unique physical and chemical properties of bedrock formations determine their value for use as crushed rock, so do various lithologies of particles in a sand and gravel deposit determine its suitability for various uses. The presence of objectionable lithologies such as chert, siltstone, and shale, even in relatively small amounts, can result in a reduction in the quality of an aggregate, especially for high-quality uses such as concrete or structures. Deposits known to contain objectionable lithologies are indicated by an "L" in the quality component of the Deposit Symbol.

If the Deposit Symbol indicates either "C", "O", or "L" or any combination, the quality of the deposit is considered to be reduced for some uses of the aggregate. No attempt has been made to quantify the degree of limitation imposed. Assessment of the four indicators is made from published data, from data contained in files of the Ontario Ministry of Transportation and Communications and the Engineering and Terrain Geology Section of the Ontario Geological Survey, and from field observations. The Engineering Materials Office of the Ontario Ministry of Transportation and Communications has recently compiled a detailed assessment of aggregate suitability for selected areas in southern Ontario. This material has been consulted extensively in preparation of the inventory reports.

Analyses of unprocessed samples obtained from test holes and pits have been plotted on grain size distribution graphs. On the graphs are the gradation specification envelopes for Ontario Ministry of Transportation and Communications' products — Granular Base Course A,B, and C; and Hot-Laid Asphaltic Sand Nos. 1, 2, 3, 4, 5, 6 and 8. By plotting the gradation curves with respect to the specification envelopes, it can be determined how well the unprocessed sampled material meets the criteria for each product.

LOCATION AND SETTING

The location and setting of a resource area has a direct influence on its value for possible extraction. The evaluation of a deposit's setting is made on the basis of those natural and man-made features which may limit or prohibit extractive development.

First, the physical context of the deposit is considered. Deposits with some physical constraint on extractive development, such as thick overburden or high water table, are less valuable resource areas because of the difficulties involved in resource recovery. Second, permanent man-made features, such as roads, railways, power lines, and housing developments, which are built on a deposit, may prohibit its extraction. The constraining effect of legally required setbacks surrounding such features is included in the evaluation. A quantitative assessment of these constraints can be made by measurement of their areal extent directly from the topographic maps. The area rendered unavailable by these features is shown for each resource area in Table 3 (Column 3).

The assessment of sand and gravel deposits and bedrock resource areas with respect to local land use and to private land ownership is an important component of the general evaluation process. These aspects of the evaluation process are not considered further in this report but

readers are encouraged to discuss them with personnel of the pertinent District Office of the Ontario Ministry of Natural Resources.

REGIONAL CONSIDERATIONS

In selecting sufficient areas for resource development, it is important to assess both the local and the regional resource base, and to forecast future production and demand patterns.

Some appreciation of future aggregate requirements in an area may be gained by assessing its present production levels and by forecasting future production trends. Such an approach is based on the assumptions that production levels in an area closely reflect the demand and that the present production "market share" of an area will remain at roughly the same level.

The aggregate resources in the region surrounding a municipality should be assessed in order to properly evaluate specific resource areas and to adopt optimum resource management plans. For example, a municipality that has large resources in comparison to its surrounding region constitutes a regionally significant resource area. Municipalities with high resources in proximity to large demand centres, such as metropolitan areas, are special cases.

Although an appreciation of the regional context is required to develop comprehensive resource management techniques, such detailed evaluation is beyond the scope of this report. The selection of resource areas made in this study is based primarily on geological data or on considerations outlined in preceding sections.

MAP 3: BEDROCK RESOURCES

Map 3 is an interpretative map derived from bedrock geology, bedrock topography, drift thickness maps, water well data from the Ontario Ministry of the Environment, oil and gas well data from the Petroleum Resources Section (Ontario Ministry of Natural Resources), and from geotechnical test hole data from various sources. Map 3 is based on concepts similar to those outlined for Maps 1 and 2, but displays both the inventory and evaluation on the one map.

The geological boundaries of the bedrock units are shown by a dashed line. Isolated outcrops are indicated by an "X". Three sets of contour lines delineate areas of less than 3 feet (1 m) of drift, areas of 3 to 25 feet (1 to 8 m) of drift, and areas of 25 to 50 feet (8 to 15 m) of drift. The extent of the areas of thin drift are shown by three shades. The darkest shade indicates areas where bedrock outcrops or is within 3 feet (1 m) of the ground surface. These areas constitute potential resource areas of primary significance because of their easy access. The medium shade indicates areas where drift cover is up to 25 feet (8 m) thick. Quarrying is possible in this depth of overburden and these also represent potential resource areas. The lightest shade indicates bedrock areas overlain by 25 to 50 feet (8 to 15 m) of overburden. These latter areas constitute resources which have extractive value only in specific circumstances. Outside of these delineated areas the bedrock can be assumed to be covered by more than 50 feet (15 m) of overburden, a depth generally considered to be too great to allow economic extraction (unless part of the overburden is composed of economically attractive sand and gravel deposits).

Other inventory information presented on Map 3 is designed to give an indication of the present level of extractive activity in the municipality. Those areas which are licenced for extraction under The Pits and Quarries Control Act, 1971 are shown by a solid outline and identified by a number which refers to the quarry descriptions in Table 5. Each description notes the owner, location, and licenced acreage of the quarry and an estimate of face height. Unlicenced quarries (abandoned quarries or wayside quarries operating on demand under authority of a permit) are also identified and numbered on Map 3 and described in Table 5. One additional symbol appears on the map: an open dot indicates the location of a selected well which penetrates bedrock. The overburden thickness is shown in feet beside the open dot.

SELECTION CRITERIA

Criteria equivalent to those used for sand and gravel deposits are used to select bedrock areas most favourable for extractive development.

The evaluation of bedrock resources is made primarily on the basis of performance and suitability data established by laboratory testing at the Ontario Ministry of Transportation and

Communications. The main characteristics and uses of the bedrock formations found in southern Ontario are summarized in Appendix D.

Deposit "size" is related directly to the areal extent of thin drift cover overlying favourable bedrock formations of sufficient thickness to support quarry operations. Since vertical and lateral variations in bedrock units are much more gradual than in sand and gravel deposits, the quality and quantity of the resource is usually consistent over large areas.

Quality of the aggregate derived from specific bedrock units is established by the performance standards previously mentioned. Location and setting criteria and regional considerations are identical to those for sand and gravel deposits.

SELECTED RESOURCE AREAS

Selection of Bedrock Resource Areas has been restricted to a single level of significance. Three factors support this approach. First, quality and quantity variations are gradual. Second, the areal extent of a given quarry operation is much smaller than that of a sand and gravel pit producing an equivalent tonnage of material, and third, since crushed bedrock has a higher unit value than sand and gravel, longer haul distances can be considered. These factors allow the identification of alternative sites having similar development potential. The Selected Areas are shown on Map 3 by a line pattern and the calculated available tonnages are given in Table 6.

Selected Bedrock Resource Areas shown on Map 3 are not permanent, single land use units which must be incorporated in an official planning document. They represent areas in which a major bedrock resource is known to exist. Such a resource area may be reserved wholly or partially for extractive development and/or resource protection within the context of the official plan.

PART III - ASSESSMENT OF AGGREGATE RESOURCES IN FLOS TOWNSHIP

LOCATION AND POPULATION

Flos Township occupies a rectangular area of 63,872 acres (25 849 ha) in north-central Simcoe County. It is shown on portions of the Orr Lake (31 D/12), and Barrie (31 D/5) map sheets of the National Topographic System at a scale of 1:50 000.

The Village of Elmvale is the largest population centre in the township. In 1980, the population of the village was 1165 and figures from previous years indicate that its population has decreased by about 3 percent since 1973 (Ontario Ministry of Intergovernmental Affairs 1981; Ontario Ministry of Treasury, Economics and Intergovernmental Affairs 1974). Total population of Flos Township, excluding Elmvale, has also decreased significantly from 2936 in 1973 to 2492 in 1980.

Population projections made by the Regional Planning Branch of the Ontario Ministry of Treasury, Economics and Intergovernmental Affairs (1976, p. 134) indicate that the population of all townships in Simcoe County may increase by about 30 percent by the year 2000. Throughout central Ontario, the majority of the population increase will come from internal migration. Local growth will be accomodated by rural-residential development and some urban growth. The number of rural-farm residents is not expected to increase greatly.

Road access in the township is good. The area is served by King's Highways 27, 92 and 93 as well as a connecting network of paved county roads and gravel-surfaced township roads. Rail access is provided by a line of the Canadian Pacific Railway, which cuts across the southeast corner of the township.

PHYSIOGRAPHY AND SURFICIAL GEOLOGY

The physiography and distribution of surficial materials including the sand and gravel deposits shown on Map 1 are largely the result of continental glaciation which took place some 23 000 to 10 000 years ago during the Great Ice Age (Late Wisconsinan Substage of the Pleistocene Epoch). The onset of this period was marked by lobes or sub-masses of the continental ice-sheet advancing out of the Great Lakes basins, covering southern Ontario entirely. The remainder of this period was characterized by the repeated advance, melting and retreat of the margins of these glacial lobes.

Flos Township is situated within the Simcoe Lowlands and Simcoe Uplands physiographic regions. For a detailed discussion of these areas the reader is referred to pages 299 and 307 of The Physiography of Southern Ontario by L.J. Chapman and D.F. Putnam (1966).

Quaternary deposits covering Flos Township were deposited during or after the Port Bruce Stadial by the Lake Simcoe and Georgian Bay ice lobes (Burwasser 1974). These deposits consist mainly of glaciolacustrine, ice-contact and outwash materials as well as till.

Allenwood till (Burwasser, unpublished report) is exposed on the surface of the Edenvale Moraine in the western part of the Simcoe Lowlands portion of the township between Vigo and Allenwood. This material is a sandy silt till with moderate relief, partly subdued by lacustrine action. Flutings and fabric within the till indicate emplacement from the west-northwest by ice moving out of Georgian Bay. The till has no economic potential as an aggregate source because of its excessive fines content. However, the south facing slope of the Edenvale Moraine is marked by a number of shore terraces and beach ridges, which may have limited potential as local aggregate sources.

The central portion of the study area is within the Nottawasaga basin portion of the Simcoe Lowlands, which is the relatively flat bed of the ancient glacial Lake Algonquin. The bed of the glacial lake is situated at an elevation of 700 to 725 feet (213 to 221 m) above sea level (a.s.l.). The floor of the lowland is composed of various glaciolacustrine deposits. During maximum inundation by Lake Algonquin and during its successive lower stages, sand was deposited close to the shorelines, silt was carried some distance offshore and only clay reached the deeper water. With each lower lake stage the succession was repeated giving a lateral sequence of sand, silt and clay (Deane 1950). The value of these areas as a resource is limited to their agricultural and farming potential.

Shorebluffs of the main stages of glacial Lake Algonquin and its associated beach and nearshore deposits border the flat-lying areas, where land lay above the level of the lake. There is a possibility of economic granular deposits in these areas. They are indicated on Map 1 as lacustrine plain and lacustrine beach sands or gravels.

Adjacent to the Simcoe Lowlands, in the eastern part of the township, the Simcoe Uplands are represented by an elevated till plain reaching an average maximum elevation of about 950 feet (290 m) a.s.l. These areas are frequently referred to as "Algonquin Islands" since they appear to have formed islands in Lake Algonquin. The till of the Algonquin Islands is described as a brown sandy silt to sandy loam till deposited by a glacier from the northeast (Burwasser and Boyd 1974). In the township area this till is overlain by substratified to stratified ablational-phase ice-contact sand. Two test holes (see Map 1 and Table 7) have been drilled in these deposits by the Ontario Geological Survey, Ministry of Natural Resources. Fine to medium sand with some silt and occasional fine gravel seams have been encountered. Test hole FL-TH-1 was drilled to 50 feet (15 m) and test hole FL-TH-2 was drilled to a 25-foot (8 m) depth. These deposits may contain pockets of aggregate with a highly variable sand and gravel content, but the till has very little value as a mineral aggregate resource.

Glaciofluvial outwash sand and minor gravel with boulder lag deposits are found around the Algonquin Islands. This material has been reworked by the waters of glacial Lake Algonquin (Burwasser and Boyd 1974). These areas are indicated as outwash sand deposits on Map 1. An extensive deposit is situated southwest of Phelpston and extends to the Flos-Vespra township boundary. Burwasser and Cairns (1974) mapped this deposit as glaciofluvial outwash gravel and gravelly sand, surface modified by subsequent aqueous erosion and overlain by glaciolacustrine sand. This deposit is the most promising aggregate source in the township as evidenced by the six commercial operations already established within its boundaries. The quality of coarse and fine aggregate in this deposit is generally good and is suitable for Hot-Laid No. 4 asphaltic aggregate uses (Deike 1980).

The end of glacial activity in this area was marked by the draining of glacial Lake Algonquin. Postglacial erosional and depositional processes have since been of relatively minor importance in modifying the physiography of Flos Township.

EXTRACTIVE ACTIVITY

Numerous sand and gravel pits have been opened in the township. A number of the properties have become inactive since designation of the township in 1975 under The Pits and Quarries Control Act, 1971. At the time of writing, twelve properties were licenced to operate. The total area licenced for sand and gravel extraction is 692.6 acres (280.3 ha).

Licenced pits appear in two major groups in the township. Extractive activity has been concentrated in glaciofluvial outwash deposits southwest of the settlement of Phelpston and in beach deposits northwest of Orr Lake.

Most licenced pits have a "high" pit use rating according to criteria established by the Ontario Ministry of Transportation and Communications (Deike 1980). These sources are designated and approved for supplying large quantities of Granular Base Course (G.B.C.) A,B and C material, as well as Hot-Laid (H.L.) No. 4 asphaltic aggregate and other high-quality aggregate when suitable processing is carried out. A few licenced pits in the township have a "moderate to high" pit use rating and are able to meet the demand for G.B.C. A, B and C and crushable gravel suitable for use in H.L.4 asphalt paving mixes.

Records of the total annual production from all licenced and wayside pits have been kept by the Huronia District Office of the Ontario Ministry of Natural Resources since designation of the township.

Annual records of production from licenced sources for the period of 1977 to 1980 are as follows:

	Total Production (From Licenced Sources)	
Year	Tons	Tonnes
1977	326,200	(295 929)
1978	178,400	(161 844)
1979	248,100	(225 076)
1980	186,820	(169 483)

The average annual production for the four-year period (1977-1980) is approximately 235,000 tons (213 000 tonnes). Production of sand and gravel for the same period from wayside pits (for which permits rather than licences are required) has been variable due to the fluctuating frequency of road construction activities in the area. Total annual production from wayside pits in the township during 1980 was 80,000 tons (73 000 tonnes).

SELECTED SAND AND GRAVEL RESOURCE AREAS

The sand and gravel deposits selected for possible resource protection are shown on Map 2. Three resource areas of primary significance have been selected and have been numbered sequentially in order of their value as a resource.

Two of the selected areas of primary significance are of glaciofluvial origin. Resource Area 2 is a glaciolacustrine beach deposit. Additional deposits have been selected as areas of secondary significance. These areas are mapped as ice-contact, outwash and lacustrine beach deposits on Map 1. These secondary areas may not have commercial significance under present or near future market conditions, however they may have strategic local value.

The sand and gravel deposits selected for possible resource protection in the township occupy a total of 3000 acres (1210 ha), exclusive of licenced areas. Cultural constraints and previous extractive activity reduce the area presently available to 2350 acres (950 ha). Using calculation techniques described in Part I, approximately 144 million tons (131 million tonnes) of sand and gravel are presently available for extraction. The available portions of the Selected Areas represent 9 percent of the total area occupied by sand and gravel deposits in the township, and contain 16 percent of the total resource tonnage.

SELECTED SAND AND GRAVEL RESOURCE AREA 1

Selected Sand and Gravel Resource Area 1 located southwest of Phelpston is a glaciofluvial outwash gravel and gravelly sand deposit. The surface of the deposit has been modified by subsequent lacustrine processes (Burwasser and Boyd 1974). This deposit is a favourable extractive site because of its size, location and the presence of established extractive activity in it.

Four licenced pits (pit nos. 7, 8, 9 and 10) are developed in the northern part of Area 1. Face heights in these pits range from 15 to 40 feet (5 to 12 m) and expose poorly to moderately sorted gravel with numerous sandy layers. The gravel content is quite variable throughout the deposit making sand selection and control a common requirement for the production of crushed aggregate products. The occasional presence of silt and clay seams limits the aggregate's suitability for some higher specification uses. However, the gradation and lithology of the aggregate are generally good.

Aggregate suitability data obtained from the Ontario Ministry of Transportation and Communications (Deike 1980) indicate that the aggregate is of high quality and is acceptable for a wide range of road-building and construction products with suitable processing and quality control. These products include Granular Base Course A, B and C as well as all hot-laid and concrete uses except H.L.1. Processing may be required to remove or crush oversize cobbles and boulders for the production of Granular Base Course B and C.

The Selected Area occupies 2400 acres (970 ha), excluding licenced properties. Previous extraction and cultural constraints reduce the Resource Area to 2200 acres (890 ha) presently available for extraction. Assuming an average thickness of 25 feet (8 m) available sand and gravel resources are estimated to be 138 million tons (125 million tonnes).

SELECTED SAND AND GRAVEL RESOURCE AREA 2

Selected Sand and Gravel Resource Area 2 located northwest of Orr Lake is a glaciofluvial outwash gravel and gravelly sand deposit which was subsequently reworked into a beach deposit by glaciolacustrine wave action (Burwasser and Boyd 1974; Hewitt and Karrow 1963). The deposit is mapped as a lacustrine beach on Map 1 and is included in Table 1 under the same symbol.

Four licenced pits (pit nos. 3, 4, 5 and 6) have been opened in the deposit. Face heights in the pits range from 5 to 30 feet (2 to 9 m) and expose stratified poorly to moderately sorted sandy gravel overlain in places by stratified

well sorted fine to medium gravel and silty sand. Hewitt and Karrow (1963, p. 84) note that: "The gravel deposit (in licenced pit no. 6) is similar to that in the Pilon Pit (pit no. 3) but is somewhat coarser. A 20-foot (6 m) face is 50 percent gravel and 50 percent sand. Thirty percent of the gravel exceeds 4 inches (10 cm) and 60 percent exceeds 1 inch (2.5 cm). Crusher-run and pit-run gravel are produced."

The Selected Area occupies 130 acres (53 ha), excluding licenced areas. Previous extraction and cultural constraints reduce the Resource Area to 100 acres (40 ha) presently available for extraction. Assuming an average deposit thickness of 15 feet (5 m), available sand and gravel resources are estimated to be 4 million tons (4 million tonnes).

SELECTED SAND AND GRAVEL RESOURCE AREA 3

Selected Sand and Gravel Resource Area 3, located adjacent to Resource Area 1, is a glaciofluvial outwash gravel and gravelly sand deposit that has been modified by subsequent glaciolacustrine wave action (Burwasser and Cairns 1974). This deposit is similar to Selected Area 1, but it appears to contain more sand.

Two licenced pits (pit nos. 11 and 12) as well as one unlicenced pit (pit no. 15) have been opened in the deposit. Face heights in these deposits range from 5 to 50 feet (2 to 15 m) and crushable gravel content ranges from 0 to 40 percent. The aggregate from pits in Area 3 has been used for production of Granular Base Course A, B, C and H.L.4 stone. Sand control and blending of portions of the deposit are required in order to produce higher specification aggregate products.

Area 3 consists of 60 acres (24 ha), exclusive of licenced areas. Fifty acres (20 ha) are estimated to be available for extraction. Assuming an average deposit thickness of 15 feet (5 m), total available sand and gravel resources are estimated to be 2 million tons (2 million tonnes).

SAND AND GRAVEL RESOURCE AREAS OF SECONDARY SIGNIFICANCE

Several resource areas of secondary significance have been identified in Flos Township. These areas are mapped as lacustrine beach, glaciofluvial outwash and ice-contact stratified drift on Map 1.

Four lacustrine beach deposits in the western half of the township have been selected at the secondary level. These areas contain clean gravel, but shallow deposit thickness and the presence of a high water table may limit their extractive potential.

Two outwash deposits may serve as sand sources. Water well data confirm this by indicating the presence of 20 to 50 feet (6 to 15 m) of sand in these areas. Unlicenced pit no. 14 exposes a 30- to 40-foot (9 to 12 m) face of stratified medium to coarse sand. A number of large lag boulders have been noted in the pit.

The ice-contact deposit selected at the secondary level in the southeastern corner of the township is the continuation of the Bass Lake kame moraine which was likewise selected for resource protection in Oro Township (Ontario Geological Survey, in prep.). Water well data again indicate a substantial depth of sand in this deposit.

Further investigation should be undertaken in these deposits and consideration should be given to their significance in future resource management programs.

BEDROCK GEOLOGY

Bedrock underlying Flos Township consists of the nearly flat-lying strata of Paleozoic (Ordovician) sedimentary rocks known as the Verulam and Bobcaygeon Formations. Liberty (1969, p. 8) notes that: "The Ordovician strata have regional dip averaging about 25 feet to the mile (5 m to the kilometre) in a southwesterly direction."

The oldest bedrock in the township is the Bobcaygeon Formation. It occupies the northeastern half of the township and underlies the Verulam Formation in the southwestern part of the township. The Bobcaygeon Formation is composed of homogeneous, thin-bedded, fine-grained limestone with some shaly partings (Liberty 1969). It is well suited for the production of road-building and construction aggregates and has been extensively quarried elsewhere for these purposes (Dolar-Mantuani 1975). Formation thickness ranges from 80

to 112 feet (24 to 34 m). The thickness of unconsolidated sediments overlying the Bobcaygeon Formation in this area is generally greater than 200 to 300 feet (61 to 91 m) (Burwasser and Ford 1974a, b, c, d). Consequently, the underlying bedrock is unexploitable as an aggregate source, and no areas have been selected for possible resource protection.

The Verulam Formation overlies the Bobcaygeon Formation in the western part of the township. The formation consists of fossiliferous, pure to impure limestone, interbedded with thin to thick layers of shale (Liberty 1969). It has been quarried for lime production elsewhere in southern Ontario, for example in Mara Township. The stone is generally unsuitable for crushed stone production because of low abrasion and freeze-thaw resistance and the presence of shaly interbeds (Dolar-Mantuani 1975). The thickness of the formation ranges from 200 to 230 feet (61 to 91 m) (Liberty 1969). The thickness of drift overlying the Verulam Formation is generally greater than 200 to 300 feet (61 to 91 m) (Burwasser and Ford 1974a, b, c, d). As a result, there have been no areas selected for possible resource protection.

SUMMARY

Sand and gravel resources in Flos Township are sufficient to supply local demand in the near future. Three Sand and Gravel Resource Areas selected for possible resource protection have an available area of 2350 acres (950 ha) with total possible resources of 144 million tons (131 million tonnes). Additional material may be found in a number of secondary areas.

Flos Township has no possible resources of bedrock-derived aggregate, and must rely totally on the surficial aggregate deposits.

Enquiries regarding the Aggregate Resources Inventory of Flos Township should be directed to the Ontario Ministry of Natural Resources either at the Huronia District Office, Midhurst, Ontario, L0L 1X0 (Tel. (705) 728-2900) or at the Central Region Office, 10670 Yonge Street, Richmond Hill, Ontario, L4C 3C9 (Tel. (416) 884-9203).

TABLE 1 | TOTAL SAND AND GRAVEL RESOURCES, FLOS TOWNSHIP*

1 CLASS NO.	2 DEPOSIT TYPE (see Appendix C)	3 AREAL EXTENT Acres (Hectares)	4 ORIGINAL TONNAGE Millions of Tons (Tonnes)
1	S-IC	7300 (2950)	365 (330)
	G-OW	2620 (1060)	130 (118)
	S-OW	1660 (670)	85 (77)
2	G-LB	200 (81)	8 (7)
	S-LP	11,700 (4750)	295 (270)
	G-OW	125 (51)	5 (4)
	S-OW	200 (81)	8 (7)
3	G-LB	320 (130)	6 (5)
	S-LB	425 (172)	7 (6)
4	S-LB	610 (247)	6 (5)
	S-OW	1710 (690)	15 (14)
		27,000 (11 000)	930 (840)

* Identified deposit areas within the Village of Elmvale have been omitted on all tables.

N.B. Minor variations in above table are due to rounding of data.

TABLE 2 | SAND AND GRAVEL PITS, FLOS TOWNSHIP

1 NO.	2 MTC NO.	3 OWNER/OPERATOR	4 LOT	5 CON.	6 LICENCED AREAS Acres (Hectares)	7 FACE HEIGHT Feet (Metres)	8 % GRAVEL
LICENCED PITS							
1	O3-7	Copeland Milling Co. Ltd.	13, 14	9	90.8 (36.8)	8-10 (2-3)	35 high water table
2	–	Malcolm Watson	13	9	20.3 (8.2)	unopened	
3	O3-3	Bernie Pilon	71	1W.P.R.	45.6 (18.4)	10-20 (3-6)	25-40
4	–	Luc Desroches	71	1W.P.R.	73.9 (29.9)	5-8 (2)	30
5	–	Twp. of Tiny	70	1W.P.R.	6.2 (2.5)	15-20 (5-6)	30-50
6	–	The Corp. of the Twp. of Flos & The Corp. of the Village of Elmvale	70	1W.P.R.	52.6 (21.3)	15-30 (5-9)	60-70
7	E3-121	A.G. Cook Ltd.	15	4	93.0 (37.6)	35-40 (11-12)	60-80 variable
8	O3-147	Martin Degroot	13	4	78.4 (31.7)	20-30 (6-9)	60-80 variable
9	E3-145	L&J Whitton	12	4	50.0 (20.2)	20 (6)	30-40
10	E3-159	Unknown	12	4	40.9 (16.6)	15-20 (5-6)	30-40
11	B3-80	William Priest	14	1	104.8 (42.4)	15 (5)	sand
12	B3-81	Garry Priest	13	1	36.1 (14.6)	20-50 (6-15)	30-40
					692.6 (280.3)		

TABLE 2 | SAND AND GRAVEL PITS, FLOS TOWNSHIP

1 NO.	2 MTC NO.	3 OWNER/OPERATOR	4 LOT	5 CON.	6 LICENCED AREAS Acres (Hectares)	7 FACE HEIGHT Feet (Metres)	8 % GRAVEL
UNLICENCED PITS*							
13	O3-25	Archer	14	7	–	4 (1)	rehabilitated
14	E3-31	Jamison	1	7	–	30-40 (9-12)	sand
15	B3-134	Mrs. Dennis	13	2	–	5-10 (2-3)	30-40
16	B3-156	H. Cole	15	1	–	10 (3)	sand
17	B3-38	P. Griffin	27	1	–	15 (5)	10-20
18	–	J. & M. Ritchie	71	1W.P.R.	–	10-15 (3-5)	25-40
19	–	C. & J. Martin	50	1		–	earth borrow

* Abandoned pits or wayside pits operating on demand under authority of a permit.

TABLE 3 | SELECTED SAND AND GRAVEL RESOURCE AREAS, FLOS TOWNSHIP

1 DEPOSIT NO.	2 UNLICENCED AREA Acres (Hectares)	3 CULTURAL SETBACKS Acres (Hectares)	4 EXTRACTED AREA Acres (Hectares)	5 AVAILABLE AREA Acres (Hectares)	6 ESTIMATED DEPOSIT THICKNESS Feet (Metres)	7 AVAILABLE AGGREGATE Millions of Tons (Tonnes)
1	2400 (970)	190 (77)	5 (2)	2200 (890)	25 (8)	138 (125)
2	130 (53)	25 (10)	5 (2)	100 (40)	15 (5)	4 (4)
3	60 (24)	5 (2)	5 (2)	50 (20)	15 (5)	2 (2)
	3000 (1210)	220 (89)	15 (6)	2350 (950)		144 (131)

N.B. Minor variations in above table are due to rounding of data.

TABLE 4 | TOTAL IDENTIFIED BEDROCK RESOURCES, FLOS TOWNSHIP

1 **DRIFT THICKNESS** Feet (Metres)	2 **FORMATION**	3 **ESTIMATED DEPOSIT THICKNESS** Feet (Metres)	4 **AREAL EXTENT** Acres (Hectares)	5 **ORIGINAL TONNAGE** Millions of Tons (Tonnes)
		– NONE –		

TABLE 5 | QUARRIES, FLOS TOWNSHIP

1 NO.	2 MTC NO.	3 OWNER/OPERATOR	4 LOT	5 CON.	6 LICENCED AREA Acres (Hectares)	7 FACE HEIGHT Feet (Metres)

– NONE –

TABLE 6 | SELECTED BEDROCK RESOURCE AREAS, FLOS TOWNSHIP

1 **DEPOSIT NO.**	2 **DEPTH OF OVERBURDEN** Feet (Metres)	3 **UNLICENCED AREA** Acres (Hectares)	4 **CULTURAL SETBACKS** Acres (Hectares)	5 **EXTRACTED AREA** Acres (Hectares)	6 **AVAILABLE AREA** Acres (Hectares)	7 **ESTIMATED WORKABLE THICKNESS** Feet (Metres)	8 **AVAILABLE RESOURCES** Millions of Tons (Tonnes)

– NONE –

TABLE 7 | SUMMARY OF TEST HOLE DATA, FLOS TOWNSHIP

TEST HOLE NUMBER: FL-TH-1

LOCATION: Con. 1, Lot 73

ELEVATION: Approx. 900 feet (274 m) a.s.l.

DATE: November 14, 1980

DEPTH feet (metres)	DESCRIPTION
0-15 (0-5)	very clean fine to medium SAND
15-30 (5-9)	fine SAND with a trace of silt
30-50 (9-15)	medium to coarse SAND with a trace of silt; becoming pebbly below 37 feet (11 m)

TEST HOLE NUMBER: FL-TH-2

LOCATION: Con. 1, Lot 60

ELEVATION: Approx. 850 feet (259 m) a.s.l.

DATE: November 14, 1980

DEPTH feet (metres)	DESCRIPTION
0-10 (0-3)	very clean fine to medium SAND
10-15 (3-5)	medium SAND with trace of silt and fine gravel
15-25 (5-8)	clean medium to coarse SAND water encountered at 20 feet (6 m).

REFERENCES

Association of Professional Engineers of Ontario
1976: Performance Standards for Professional Engineers Advising on and Reporting on Oil, Gas and Mineral Properties; Association of Professional Engineers of Ontario, 11 p.

Burwasser, G.J.
1974: Quaternary Geology of the Barrie and Orr Lake Areas, Southern Ontario; pp. 186-188 in Summary of Field Work, 1974, by the Geological Branch, edited by V.G. Milne, D.F. Hewitt, and K.D. Card; Ontario Division of Mines, Miscellaneous Paper 59, 206 p.

unpublished
report: Quaternary Geology of the Nottawasaga Area, Southern Ontario; Ontario Geological Survey, unpublished report.

Burwasser, G.J. and Boyd, S.T.
1974: Quaternary Geology of the Orr Lake Area (Western Half)-Nottawasaga Area (Eastern Half), Southern Ontario; Ontario Division of Mines, Preliminary Map P.975, scale 1:50 000.

Burwasser, G.J. and Cairns, B.D.
1974: Quaternary Geology of the Barrie Area (Western Half), Southern Ontario; Ontario Division of Mines, Preliminary Map P.978, scale 1:50 000.

Burwasser, G.J. and Ford, M.J.
1974a: Bedrock Topography of the Barrie Area, Southern Ontario; Ontario Division of Mines, Preliminary Map P.979, Bedrock Topography Series, scale 1:50 000.
1974b: Bedrock Topography of the Orr Lake Area, Southern Ontario; Ontario Division of Mines, Preliminary Map P.976, Bedrock Topography Series, scale 1:50 000.
1974c: Drift Thickness of the Barrie Area, Southern Ontario; Ontario Division of Mines, Preliminary Map P.980, Drift Thickness Series, scale 1:50 00.
1974d: Drift Thickness of the Orr Lake Area, Southern Ontario; Ontario Division of Mines, Preliminary Map P.977, Drift Thickness Series, scale 1:50 000.

Chapman, L.J. and Putnam, D.F.
1966: The Physiography of Southern Ontario; Second Edition, Ontario Research Foundation, University of Toronto Press, 386 p.

Deane, R.E.
1950: Pleistocene Geology of the Lake Simcoe District, Ontario; Geological Survey of Canada, Memoir 256, 108 p. Accompanied by two maps, scale 1:126 720.

Deike, W.F.
1980: Aggregate Suitability Evaluation, Flos Township; Soils and Aggregates Section, Engineering Materials Office, Ontario Ministry of Transportation and Communications, 4 p., unpublished report.

Dolar-Mantuani, L.
1975: Petrography and Utilization of Paleozoic Middle Ordovician Carbonate Rocks in Southern Ontario; Ontario Division of Mines, Industrial Mineral Report 42, 59 p.

Hewitt, D.F. and Karrow, P.F.
1963: Sand and Gravel in Southern Ontario; Ontario Department of Mines, Industrial Mineral Report 11, 151 p.

Liberty, B.A.
1969: Paleozoic Geology of the Lake Simcoe Area, Ontario; Geological Survey of Canada, Memoir 355, 201 p. Accompanied by Map 1228A, scale 1:253 400.

Ontario
1981: The Pits and Quarries Control Act, 1971; Revised Statutes of Ontario, 1980, Chapter 378, Queen's Printer for Ontario.

Ontario Geological Survey
in prep: Aggregate Resources Inventory of Oro Township, Simcoe County; Ontario Geological Survey, Aggregate Resources Inventory Paper 65, in preparation.

Ontario Interministerial Committee on National Standards and Specifications (Metric Committee)

1975: Metric Practice Guide; 67 p.

Ontario Ministry of Intergovernmental Affairs
1981: Municipal Directory 1981; Queen's Printer for Ontario, 191 p.

Ontario Ministry of Natural Resources
1980: Statistics 1980; Ministry of Natural Resources, 122 p.

Ontario Ministry of Treasury, Economics and Intergovernmental Affairs
1974: Municipal Directory 1974; Queen's Printer for Ontario, 128 p.
1976: Ontario's Changing Population, Volume 2, Directions and Impact of Future Change 1971-2001; Regional Planning Branch, 184 p.

Robertson, J.A.
1975: Mineral Deposit Studies, Mineral Potential Evaluation and Regional Planning in Ontario; Ontario Division of Mines, Miscellaneous Paper 61, 42 p.

APPENDIX A - SUGGESTED ADDITIONAL READING

American Geological Institute
1972: Glossary of Geology; Washington, D.C., 858 p.

Bauer, A.M.
1970: A Guide to Site Development and Rehabilitation of Pits and Quarries; Ontario Department of Mines, Industrial Mineral Report 33, 62 p.

Cowan, W.R.
1977: Toward the Inventory of Ontario's Mineral Aggregates; Ontario Geological Survey, Miscellaneous Paper 73, 19 p.

Fairbridge, R.W. (ed.)
1968: The Encyclopedia of Geomorphology; Encyclopedia of Earth Sciences, Vol. III, Reinhold Book Corp., N.Y., 1295 p.

Flint, R.F.
1971: Glacial and Quaternary Geology, John Wiley and Sons Inc., 892 p.

Hewitt, D.F.
1960: The Limestone Industries of Ontario; Ontario Department of Mines, Industrial Mineral Circular 5, 177 p.
1964a: Building Stones of Ontario, Part I Introduction; Ontario Department of Mines, Industrial Mineral Report 14, 43 p.
1964b: Building Stones of Ontario, Part II Limestone; Ontario Department of Mines, Industrial Report 15, 43 p.
1964c: Building Stones of Ontario, Part III Marble; Ontario Department of Mines, Industrial Mineral Report 16, 89 p.
1964d: Building Stones of Ontario, Part IV Sandstone; Ontario Department of Mines, Industrial Mineral Report 17, 57 p.
1972: Paleozoic Geology of Southern Ontario; Ontario Division of Mines, Geological Report 105, 18 p.

Hewitt, D.F. and Karrow, P.F.
1963: Sand and Gravel in Southern Ontario; Ontario Department of Mines, Industrial Mineral Report 11, 151 p.

Hewitt, D.F. and Vos, M.A.
1970: Urbanization and Rehabilitation of Pits and Quarries; Ontario Department of Mines, Industrial Mineral Report 34, 21 p.

Lowe, S.B.
1980: Trees and Shrubs for the Improvement and Rehabilitation of Pits and Quarries in Ontario; Ontario Ministry of Natural Resources, 71 p.

McLellan, A.G.; Yundt, S.E. and Dorfman, M.L.
1979: Abandoned Pits and Quarries in Ontario; Ontario Geological Survey, Miscellaneous Paper 79, 36 p.

Ontario Mineral Aggregate Working Party
1977: A Policy for Mineral Aggregate Resource Management in Ontario; Ontario Ministry of Natural Resources, 232 p.

Ontario Ministry of Natural Resources
1975: Vegetation for the Rehabilitation of Pits and Quarries; Forest Management Branch, Division of Forests, 38 p.

Peat, Marwick & Partners and
M.M. Dillon Limited
1981: Mineral Aggregate Transportation Study; Industrial Minerals Background Paper 1, 133 p. Summary Report 26 p.

Proctor and Redfern Limited
1974: Mineral Aggregate Study, Central Ontario Planning Region; Prepared for the Ontario Ministry of Natural Resources, over 100 p.

Proctor and Redfern Limited and
Gartner Lee Associates Limited
1975: Mineral Aggregate Study of Part of The Eastern Ontario Region; Prepared for the Ontario Ministry of Natural Resources, about 200 p.
1977: Mineral Aggregate Study and Geological Inventory, Southwestern Region of Ontario; Prepared for the Ontario Ministry of Natural Resources, about 200 p.

APPENDIX B - GLOSSARY

ABRASION RESISTANCE

Tests such as the Los Angeles Abrasion Test are used to measure the ability of aggregate to resist crushing and pulverizing under conditions similar to those encountered in processing and use. Measuring resistance is an important component in the evaluation of the quality and prospective uses of aggregate. Hard, durable material is preferred for road building.

ABSORPTION CAPACITY

Related to the porosity of the rock types of which an aggregate is composed. Porous rocks are subject to disintegration when absorbed liquids freeze and thaw, thus decreasing the strength of the aggregate.

AGGREGATE

Any hard, inert, construction material (sand, gravel, shells, slag, crushed stone or other mineral material) used for mixing in various-sized fragments with a cement or bituminous material to form concrete, mortar, etc., or used alone for road building or other construction. Synonyms include mineral aggregate and granular material.

ALKALI-AGGREGATE REACTION

A chemical reaction between the alkalies of portland cement and certain minerals found in rocks used for aggregate. Alkali-aggregate reactions are undesirable because they can cause expansion and cracking of concrete. Although perfectly suitable for building stone and asphalt applications, alkali-reactive aggregates should be avoided for structural concrete uses.

BLENDING

Required in cases of extreme coarseness, fineness or other irregularities in the gradation of unprocessed aggregate. Blending is done with approved sand-sized aggregate in order to satisfy the gradation requirements of the material.

CAMBRIAN

The first period of the Paleozoic Era, thought to have covered the time between 570 and 500 million years ago; the Cambrian precedes the Ordovician Period.

CLAST

An individual constituent, grain or fragment of a sediment or rock, produced by the mechanical weathering of a larger rock mass. Synonyms include particle and fragment.

CRUSHABLE AGGREGATE

Unprocessed gravel containing a minimum of 35 percent coarse aggregate larger than the No. 4 sieve (4.75 mm) as well as a minimum of 20 percent greater than the 26.5 mm sieve.

DELETERIOUS LITHOLOGY

A general term used to designate those rock types which are chemically or physically unsuited for use as construction or road-building aggregates. Such lithologies as chert, shale, siltstone and sandstone may deteriorate rapidly when exposed to traffic and other environmental conditions.

DEVONIAN

A period of the geological past thought to have covered the span of time between 395 and 345 million years ago, following the Silurian Period. Rocks formed in the Devonian Period are among the youngest found in Ontario.

DOLOSTONE

A carbonate sedimentary rock consisting chiefly of the mineral dolomite and containing relatively little calcite (dolostone is also known as dolomite).

DRIFT

A general term for all unconsolidated rock debris transported from one place and deposited

in another; distinguished from underlying bedrock. In North America, glacial activity has been the dominant mode of transport and deposition of drift. Synonyms include overburden and surficial deposit.

DRUMLIN

A low, smoothly rounded, elongated hill, mound, or ridge composed of glacial materials. These landforms were deposited beneath an advancing ice sheet, and were shaped by its flow.

EOLIAN

Pertaining to the wind, especially with respect to landforms whose constituents were transported and deposited by wind activity. Sand dunes are an example of an eolian landform.

FINES

A general term used to describe the size fraction of an aggregate which passes (is finer than) the No. 200 mesh screen (.075 mm). Also described informally as "dirt", these particles are in the silt and clay size range.

GLACIAL LOBE

A tongue-like projection from the margin of the main mass of an ice cap or ice sheet. During the Pleistocene Epoch several lobes of the Laurentide continental ice sheet occupied the Great Lakes basins. These lobes advanced and retreated numerous times during the Pleistocene, producing the complex arrangement of glacial material and landforms found in southern Ontario.

GRADATION

The proportion of material of each particle size, or the frequency distribution of the various sizes which constitute a sediment. The strength, durability, permeability and stability of an aggregate depend to a great extent on its gradation. The size limits for different particles are as follows:

Boulder	more than 200 mm
Cobbles	75-200 mm
Coarse Gravel	26.5-75 mm
Fine Gravel	4.75-26.5 mm
Coarse Sand	2-4.75 mm
Medium Sand	0.425-2 mm
Fine Sand	0.075-0.425 mm
Silt, Clay	less than 0.075 mm

GRANULAR BASE COURSE

Components of the pavement structure of a road, which are placed on the subgrade and are designed to provide strength, stability and drainage, as well as support for surfacing materials. Several types have been defined: Granular Base Course A consists of crushed and processed aggregate and has relatively stringent quality standards in comparison to Granular Base Course B and C which are usually pit-run or other unprocessed aggregate.

HOT-LAID (OR ASPHALTIC) AGGREGATE

Bituminous, cemented aggregates used in the construction of pavements either as surface or bearing course (H.L. 1, 3 and 4), or as binder course (H.L. 2, 6 and 8) used to bind the surface course to the underlying granular base course.

LITHOLOGY

The description of rocks on the basis of such characteristics as color, structure, mineralogic composition and grain size. Generally, the description of the physical character of a rock.

MELTWATER CHANNEL

A drainage way, often terraced, produced by water flowing away from a melting glacier margin.

ORDOVICIAN

An early period of the Paleozoic Era thought to have covered the span of time between 500 and 435 million years ago.

PALEOZOIC ERA

One of the major divisions of the geologic time scale thought to have covered the time between 570 and 230 million years ago, the Paleozoic Era (or Ancient Life Era) is subdivided into six geologic periods, of which only four (Cambrian, Ordovician, Silurian and Devonian) can be recognized in southern Ontario.

PETROGRAPHIC EXAMINATION

An aggregate quality test based on known field performance of various rock types. The test result is a Petrographic Number (P.N.). The higher the P.N. the lower the quality of the aggregate.

PLEISTOCENE

An Epoch of the recent geological past including the time from approximately 1.8 million years ago to 7000 years ago. Much of the Pleistocene was characterized by extensive glacial activity and is popularly referred to as the "Great Ice Age".

POSSIBLE RESOURCE

Reserve estimates based largely on broad knowledge of the geological character of the deposit and for which there are few, if any samples or measurements. The estimates are based on assumed continuity or repetition for which there are reasonable geological indications.

SHALE

A fine-grained, sedimentary rock formed by the consolidation of clay, silt or mud and characterized by well developed bedding planes, along which the rock breaks readily into thin layers. The term shale is also commonly used for fissile claystone, siltstone and mudstone.

SILURIAN

An early period of the Paleozoic Era thought to have covered the time between 435 and 395 million years ago. The Silurian follows the Ordovician Period and precedes the Devonian Period.

SOUNDNESS

The ability of the components of an aggregate to withstand the effects of various weathering processes and agents. Unsound lithologies are subject to disintegration caused by the expansion of absorbed solutions. This may seriously impair the performance of road-building and construction aggregates.

TILL

Unsorted and unstratified rock debris, deposited directly by glaciers, and ranging in size from clay to large boulders.

WISCONSINAN

Pertaining to the last glacial period of the Pleistocene Epoch in North America. The Wisconsinan began approximately 100 000 years ago and ended approximately 7000 years ago. The glacial deposits and landforms of southern Ontario are predominantly the result of glacial activity during the Wisconsinan Stage.

APPENDIX C - GEOLOGY OF SAND AND GRAVEL DEPOSITS

The type, distribution, and extent of sand and gravel deposits in southern Ontario are the result of extensive glacial and glacially influenced activity in Wisconsinan time during the Pleistocene Epoch, approximately 100 000 to 7000 years ago. The deposit types reflect the different depositional environments that existed during the melting and retreat of the continental ice masses, and can readily be differentiated on the basis of their morphology, structure, and texture. The deposit types are described below.

GLACIOFLUVIAL DEPOSITS

These deposits can be divided into two broad categories: those that were formed in contact with (or in close proximity to) glacial ice, and those that were deposited by meltwaters carrying materials beyond the ice margin.

ICE-CONTACT TERRACES (ICT)

These are glaciofluvial features deposited between the glacial margin and a confining topographic high, such as the side of a valley. The structure of the deposits may be similar to that of outwash deposits, but in most cases the sorting and grading of the material is more variable and the bedding is discontinuous due to extensive slumping. The probability of locating large amounts of crushable aggregate is moderate, and extraction may be expensive due to the variability of the deposits both in terms of quality and grain size distribution.

KAMES (K)

Kames are defined as mounds of poorly sorted sand and gravel deposited by meltwater in depressions or fissures on the ice surface or at its margin. During glacial retreat, the melting of supporting ice causes collapse of the deposits producing internal structures characterized by bedding discontinuities. The deposits consist mainly of irregularly bedded and crossbedded, poorly sorted sand and gravel. The present forms of the deposits include single mounds, linear ridges (crevasse fillings) or complex groups of landforms. The latter are occasionally described as "undifferentiated ice-contact stratified drift" (IC) when detailed subsurface information is unavailable. Since kames commonly contain large amounts of fine-grained material and are characterized by considerable variability, there is generally a low to moderate probability of discovering large amounts of good-quality, crushable aggregate. Extractive problems encountered in these deposits are mainly the excessive variability of the aggregate and the rare presence of excess fines (silt- and clay-sized particles).

ESKERS (E)

Eskers are narrow, sinuous ridges of sand and gravel deposited by meltwaters flowing in tunnels within or at the base of glaciers, or in channels on the ice surface. Eskers vary greatly in size. Many, though not all eskers consist of a central core of poorly sorted and stratified gravel characterized by a wide range in grain size. The core material is often draped on its flanks by better sorted and stratified sand and gravel. The deposits have a high probability of containing a large proportion of crushable aggregate, and since they are generally built above the surrounding ground surface, are convenient extraction sites. For these reasons esker deposits have been traditional aggregate sources throughout southern Ontario, and are significant components of the total resources of many areas.

Some planning constraints and opportunities are inherent in the nature of the deposits. Because of their linear nature, the deposits commonly extend across several property boundaries leading to unorganized extractive development at numerous small pits. On the other hand, because of their form, eskers can be easily and inexpensively extracted and are amenable to rehabilitation and sequential land use.

UNDIFFERENTIATED ICE-CONTACT STRATIFIED DRIFT (IC)

This designation may include deposits from several ice-contact, depositional environments which usually form extensive, complex landforms. It is not feasible to identify individual areas of coarse-grained material within such deposits due to their lack of continuity and grain size variability. They are given a qualitative rating based on existing pit and other subsurface data.

OUTWASH (OW)

Outwash deposits consist of sand and gravel laid down by meltwaters beyond the margin of the ice lobes. The deposits occur as sheets or as terraced valley fills (valley trains) and may be very large in extent and thickness. Well developed outwash deposits have good horizontal bedding and are uniform in grain size distribution. Outwash deposited near the glacier's margin is much more variable in texture and structure. The probability of locating useful crushable aggregates in outwash deposits is moderate to high depending on how much information on size, distribution and thickness is available.

ALLUVIUM (AL)

Alluvium is a general term for clay, silt, sand, gravel, or similar unconsolidated material deposited during postglacial time by a stream as sorted or semi-sorted sediment, on its bed or on its floodplain. The probability of locating large amounts of crushable aggregate in alluvial deposits is low, and it has generally low value due to the presence of excess silt- and clay-sized material. There are few large postglacial alluvium deposits in Ontario.

GLACIOLACUSTRINE DEPOSITS

GLACIOLACUSTRINE BEACH DEPOSITS (LB)

These are relatively narrow, linear features formed by wave action at the shores of glacial lakes that existed at various times during the deglaciation of southern Ontario. Well developed lacustrine beaches are usually less than 20 feet (6 m) thick. The aggregate is well sorted and stratified and sand-sized material commonly predominates. The composition and size distribution of the deposit depends on the nature of the source material. The probability of obtaining crushable aggregate is high when the material is developed from coarse-grained materials such as a stony till, and low when developed from fine-grained materials. Beaches are relatively narrow, linear deposits, so that extractive operations are often numerous and extensive.

GLACIOLACUSTRINE DELTAS (LD)

These features were formed where streams or rivers of glacial meltwater flowed into lakes and deposited their suspended sediment. In southern Ontario such deposits tend to consist mainly of sand and abundant silt. However, in near-ice and ice-contact positions, coarse material may be present. Although deltaic deposits may be large, the probability of obtaining coarse material is generally low.

GLACIOLACUSTRINE PLAINS (LP)

The nearly level surface marking the floor of an extinct glacial lake. The sediments which form the plain are predominantly fine to medium sand, silt, and clay, and were deposited in relatively deep water. Lacustrine deposits are generally of low value as aggregate sources due to their fine grain size and lack of crushable material. In some aggregate-poor areas, lacustrine deposits may constitute valuable sources of fill and some granular base course aggregate.

GLACIAL DEPOSITS

END MORAINES (EM)

These are belts of glacial drift deposited at, and parallel to, glacier margins. End moraines commonly consist of ice-contact stratified drift and in such instances are usually called kame moraines. Kame moraines commonly result from deposition between two glacial lobes (interlobate moraines). The probability of locating aggregates within such features is moderate to low. Exploration and development costs are high. Moraines may be very large and contain vast aggregate resources, but the location of the best resource areas within the moraine is usually poorly defined.

EOLIAN DEPOSITS

WINDBLOWN DEPOSITS (WD)

Windblown deposits are those formed by the transport and deposition of sand by winds. The form of the deposits ranges from extensive, thin layers to well developed linear and crescentic ridges known as dunes. Most windblown deposits in southern Ontario are derived from, and deposited on, pre-existing lacustrine sand plain deposits. Windblown sediments almost always consist of fine to coarse sand and are usually well sorted. The probability of locating crushable aggregate in windblown deposits is very low.

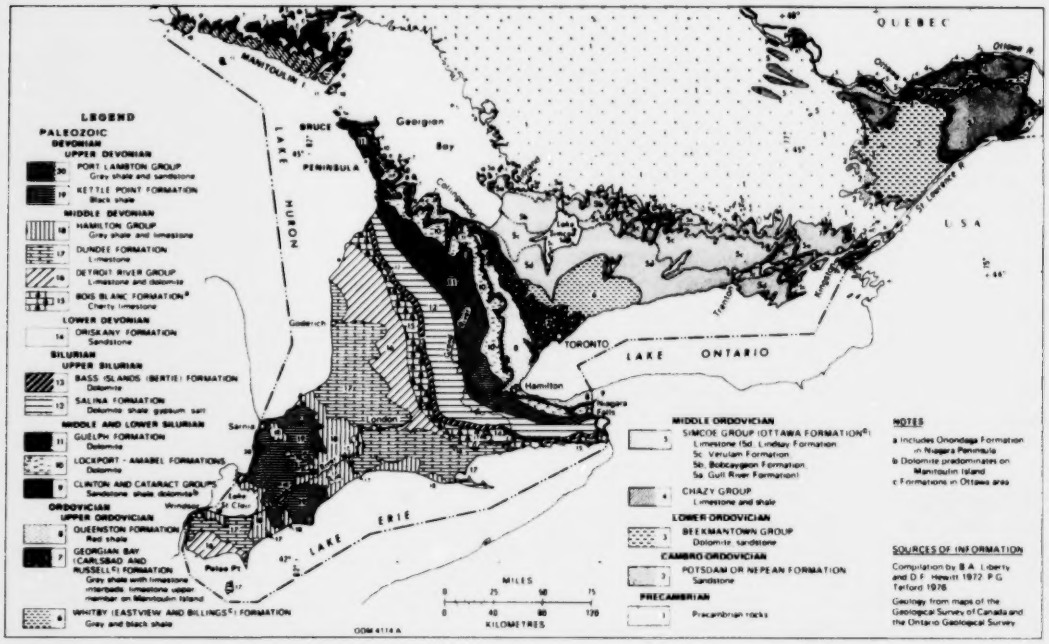

Figure 2 - Bedrock Geology of Southern Ontario

BEDROCK SUITABLE FOR CRUSHED STONE PRODUCTS

BASS ISLANDS FORMATION (UPPER SILURIAN)

(Includes the Bertie Formation of the Niagara Peninsula) Composition: Medium- to massive-bedded, aphanitic, brown dolostone with shaly partings. Thickness: 35 to 60 feet (11 to 18m) near Hagersville. Uses: Quarried for crushed stone on the Niagara Peninsula at Fort Erie, Cayuga, Hagersville, and Dunville. Los Angeles Abrasion Test: 17-35% loss; Absorption: 1.4%. Shaly parts are unsuitable for aggregate due to high soundness losses.

BOBCAYGEON FORMATION (MIDDLE ORDOVICIAN)

Composition: Compact, homogeneous, medium to thin-bedded, fine-grained limestone with some argillaceous and shaly partings. Thickness: The lower unit is 40 to 72 feet (12 to 22 m) thick in the east and the remainder of the formation is 40 feet (12 m). Uses: Quarried at Kirkfield and Marysville for crushed stone. The Bobcaygeon Formation has consistently acceptable quality for granular base course materials and concrete.

BOIS BLANC FORMATION (LOWER-MIDDLE DEVONIAN)

Composition: Brownish grey, medium-crystalline, medium- to thin-bedded, cherty limestone, commonly fossiliferous. Limestone may be silty or sandy in places. Thickness: 9 to 200 feet (3 to 61 m). Uses: Quarried at Hagersville, Cayuga, and Port Colborne for crushed stone. High chert content makes much of the material unsuitable for concrete aggregate. Los Angeles Abrasion Test: 14-28% loss; Soundness Test: 4-10% loss; Absorption: 0.7-2.0%.

DUNDEE FORMATION (MIDDLE DEVONIAN)

Composition: Fine- to medium-crystalline, brownish grey, medium- to thick-bedded, dolomitic limestone with shaly partings, sandy layers, and chert in some areas. Thickness: 60 to 160 feet (18 to 49 m). Uses: Quarried near Port Dover and Pelee Island for crushed stone.

Used at St. Marys for portland cement. Los Angeles Abrasion Test: 22-32% loss; Absorption: 0-4%.

GULL RIVER FORMATION (MIDDLE ORDOVICIAN)

Composition: Member A: thin- to thick-bedded, interbedded, grey argillaceous limestone and buff to green dolostone with a maximum thickness of 60 feet (18 m). Members B and C are dense, aphanitic limestones with argillaceous dolostone interbeds. Uses: Quarried at Kirkfield, Victoria County, and Uhthoff for crushed stone. The product is generally fresh and compact with good cubic-shaped factor, low clay content, low absorption, and low soundness losses. Smooth particle surfaces may cause adhesion problems for asphalt. There is some alkali reactivity in a few of the layers.

LOCKPORT AND AMABEL FORMATIONS (MIDDLE SILURIAN)

Composition: Amabel Formation (Waterdown to the Bruce Peninsula): massive, fine-crystalline dolostone, with reef facies dolostone near Georgetown. Lockport Formation (lateral facies equivalent to the Amabel Formation from Waterdown to Niagara Falls): thin- to massive-bedded, fine- to medium-grained dolostone. Thickness: Amabel Formation: maximum observed thickness of 84 feet (26 m). Lockport Formation: up to 130 feet (40 m). Uses: The Lockport and Amabel Formations have been used to produce lime, crushed stone, concrete aggregate and building stone throughout their area of occurrence, and are a resource of provincial significance. Los Angeles Abrasion Test: 21-35% loss; Soundness Test: 2.0% loss; Absorption: 0.4-1.6%.

ONONDAGA FORMATION (MIDDLE DEVONIAN)

(Equivalent to the Detroit River Group, with a textural change) Composition: Edgecliff Member: medium-bedded, fine- to medium-grained, dark grey cherty limestone with an estimated thickness of 25 to 30 feet (8 to 9 m). Clarence Member: massive-bedded, dark grey brown, fine-grained, very cherty limestone having an estimated thickness of 26 feet (8 m). Moorehouse Member: medium-bedded, dark grey brown or purplish brown, fine- to coarse-grained, variably cherty limestone with an estimated thickness of 15 to 25 feet (5 to 8 m). Uses: Quarried for crushed stone on the Niagara Peninsula at Welland and Port Colborne. High chert content makes much of the material unsuitable for concrete aggregate.

OTTAWA FORMATION (MIDDLE ORDOVICIAN)

Composition: Lower Phase (Lowville and Pamela Beds): shale, some sandstone and dolostone. Thickness: 100 feet (30 m). Middle Phase (Hull, Rockland, and Leray Beds): pure, thick-bedded, crystalline limestone. Thickness: 150 feet (46 m) near Ottawa. Upper Phase (Cobourg and Sherman Fall Beds): pure and impure crystalline limestone with few to numerous shaly partings, 450 to 475 feet (137 to 145 m) thick near Ottawa. Uses: The Leray, Rockland, and Hull Beds have been quarried extensively for crushed stone and for building stone. In addition, the Hull Beds are an excellent source of lime for cement production and agricultural uses.

OXFORD FORMATION (LOWER ORDOVICIAN)

Composition: Medium- to thick-bedded, grey dolostone, with some shaly partings. Thickness: 240 feet (73 m). Uses: Quarried for crushed stone (road and concrete aggregate) at Ottawa, Brockville, and Smiths Falls.

BEDROCK SUITABLE FOR LIME PRODUCTION AND OTHER CHEMICAL USES

DETROIT RIVER GROUP (MIDDLE DEVONIAN)

(Equivalent to the Onondaga Formation in the Niagara Peninsula, with a textural change) Composition: Near Beachville, the group consists of medium- to micro-crystalline, medium-bedded, high-purity limestone. It grades northwards near St. Marys to soft, evenly bedded, fine-grained dolostone with bituminous laminae. Massive, porous, reef facies material also occurs to the north (Formosa Reef Limestone). Thickness: 100 feet (30 m) at Beachville, 350 feet (107 m) at Clinton. Uses: The most important source of high-purity limestone in Ontario is the Lucas Formation of the Detroit River Group at Beachville. Detroit River limestone produces 80% of Ontario's cement. Its dolomitic reefal facies is also important for lime production to the north. It is generally unsuitable for crushed stone. The Anderdon Member of the Lucas Formation is quarried at Amherstburg for

crushed stone.

GRENVILLE MARBLE (PRECAMBRIAN)

Composition: Recrystallized white limestone and dolostone, fine- to coarse-grained, usually of high chemical purity. Uses: Lime production, but also in small amounts for terrazzo chips, poultry grit, decorative stone, and building stone.

GUELPH FORMATION (MIDDLE SILURIAN)

Composition: Aphanitic to medium-crystalline, thick-bedded, soft, porous dolostone, characterized in places by extensive vuggy, porous reefal facies dolostone of high chemical purity. The Guelph Formation and the underlying Amabel Formation have a combined thickness of 200 feet (61 m) on the Niagara Peninsula and more than 400 feet (122 m) on the Bruce Peninsula. Uses: The main use is for dolomitic lime in the construction industry. The formation is quarried near Hamilton and Guelph.

LINDSAY FORMATION (MIDDLE ORDOVICIAN)

Composition: Lower Member: fine-crystalline, rubbly, nodular-weathering limestone. Upper Member: grey calcareous claystone with shaly partings and bioclastic layers. The rock is "soft" and weathers to rubble. Both members are characterized by low dolomite content and by numerous clayey partings. Uses: Quarried at Picton, Ogden Point and Bowmanville for cement. The formation is generally unsuitable for crushed stone, concrete aggregate, or granular base course.

VERULAM FORMATION (MIDDLE ORDOVICIAN)

Composition: Fossiliferous, pure to argillaceous limestone and interbedded calcareous shale. The rock is not resistant to erosion and commonly weathers to rubble. Thickness: 200 to 300 feet (61 to 91 m). Uses: Quarried at Picton, Ogden Point, and Mara Township for cement. The formation is unsuitable for crushed stone due to clay impurities, many clayey interbeds, and low abrasion resistance, high soundness losses and poor freeze and thaw resistance.

BEDROCK SUITABLE FOR BRICK AND TILE MANUFACTURE

GEORGIAN BAY FORMATION (UPPER ORDOVICIAN)

(Formerly known as the Meaford-Dundas and Blue Mountain shales in the Toronto and Bruce Peninsula areas) Composition: Soft, fissile, blue grey shale with limey or sandy lenses in a few places. Thickness: 640 feet (195 m) at Toronto. Uses: Several producers in Metro Toronto and Cooksville produce brick and structural tile. Lightweight aggregate is also produced at Streetsville by heat expansion of the shale.

HAMILTON GROUP (MIDDLE DEVONIAN)

Composition: Grey shale with interbeds of crystalline and cherty limestone. The group has six formations, but only the Arkona is of commercial value. It is a soft, light grey, calcareous shale which is plastic and easily worked when wet. Thickness: 80 to 300 feet (24 to 91 m). Uses: The Arkona Formation is extracted at Thedford and near Arkona for production of drainage tile and brick.

QUEENSTON FORMATION (UPPER ORDOVICIAN)

Composition: Red, thin- to thick-bedded, sandy to argillaceous shale with green mottling and banding. Thickness: 400 to 500 feet (122 to 152 m). Uses: There are several large shale quarries developed in the Queenston Formation in the Toronto-Hamilton region and one at Russell, near Ottawa. All produce brick for construction. The Queenston Formation is the most important source material for brick manufacture in the Province.

BEDROCK SUITABLE FOR OTHER INDUSTRIAL PRODUCTS

NEPEAN (POTSDAM) FORMATION (CAMBRO-ORDOVICIAN)

Composition: Creamy, coarse-grained, silica sandstone. Uses: Quarried throughout its area of outcrop for building stone, decorative stone, abrasives, and for glass making.

SALINA FORMATION (UPPER SILURIAN)

Composition: Grey and red shale, brown dolomite, and, in places, salt, anhydrite, and gypsum.

The formation consists predominantly of evaporite deposits with up to eight members identified. Uses: Gypsum is mined at Hagersville, Caledonia, and Drumbo. Salt is mined at Goderich and is produced from brine wells at Amherstburg, Windsor, and Sarnia.

WHITBY FORMATION (UPPER ORDOVICIAN)

(Formerly known as Collingwood Shale near Toronto) Composition: Brown to black fissile shale. Uses: Quarried at Bowmanville for use in cement production. Testing indicates that the Whitby Formation may produce satisfactory lightweight expanded aggregate.

Waverley
Park
S 1 IC
FL-TH-1
G 2 LB
Orchard
2485
Q 115 40C
18
3
6
Gravel Pits
4
Racetrack
Wharves
Wharf
Gravel Pit
435
Wharf
Orr Lake
Wharf
Wharf
S 2 OW
S 2 LP
Foot Bridges
Sandy Bend
455
Saurin
TINY TP
FLOS TP
XI
Race Track
Sewage Disposal Bed
X
Dam
S 2 LP
Fair Grounds
Sports Track
Sawmill
Elmvale
IX
S 2 LP
Allenwood
C
P
S 4 LB
1
2
VIII
New Wasaga Beach
Drive-in Theatre
Motel
VII
Nottawasaga Bay
S 4 LB
G 3 LB
13
Gravel Pit
Crossland
VI
CANADIAN NATIONAL
S 2 LP
Langman
Gravel Pit
Golf Range
Gravel Pit
S 3 LB
Wasaga Beach
V
Fergusonvale
III
IV
II
S 1 OW
O
333S
14
2
585
189SG
S 1 IC
FL-TH-2
285
Hillsdale
MEDONTE TP
FLOS TP
Sawmill
BC
186S
Auto Wrecker
31CG
34S
4
11S
70CS
Q
19
12SG
Dugouts
Dam
Auto Wrecker
14S
25S
58S
S 1 IC
O
43
S 2 LP
26S
N

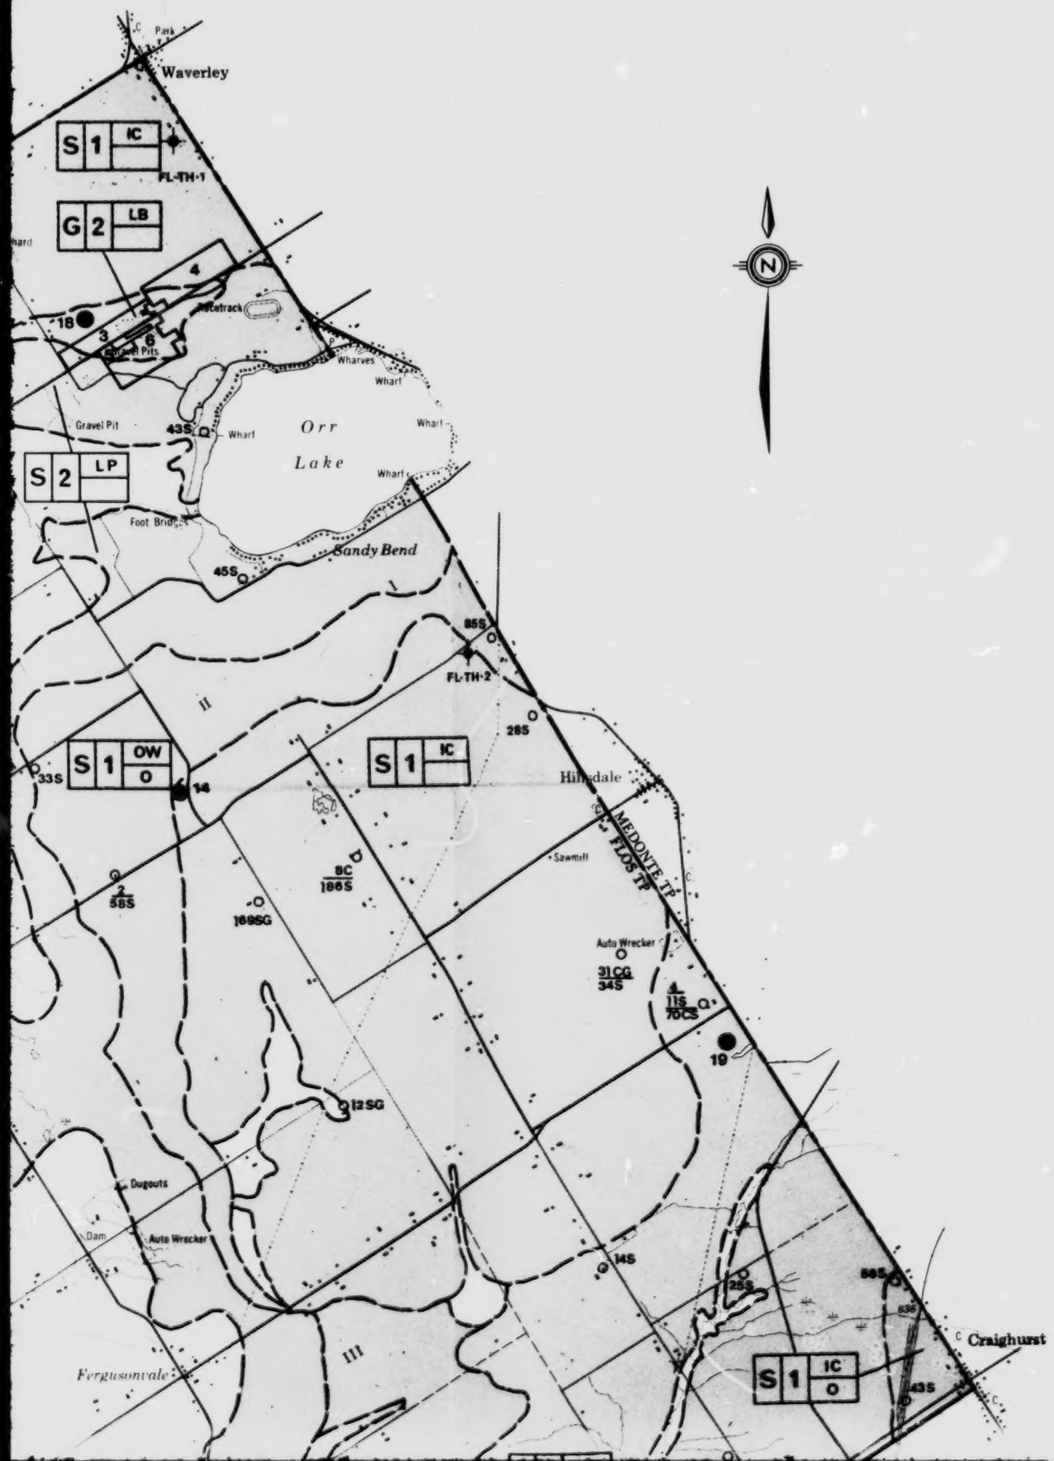

Ministry of Natural Resources
Ontario

Hon. Alan W. Pope
Minister

W.T. Foster
Deputy Minister

ONTARIO GEOLOGICAL SURVEY
AGGREGATE RESOURCES INVENTORY

FLOS TOWNSHIP
SIMCOE COUNTY

MAP 1
DISTRIBUTION OF SAND AND GRAVEL DEPOSITS

Scale 1:50 000

Mile 1 0 1 Mile

Metres 1000 0 1 Kilometre

NTS Reference: 31 D/5 31 D/12

© OMNR-OGS 1982

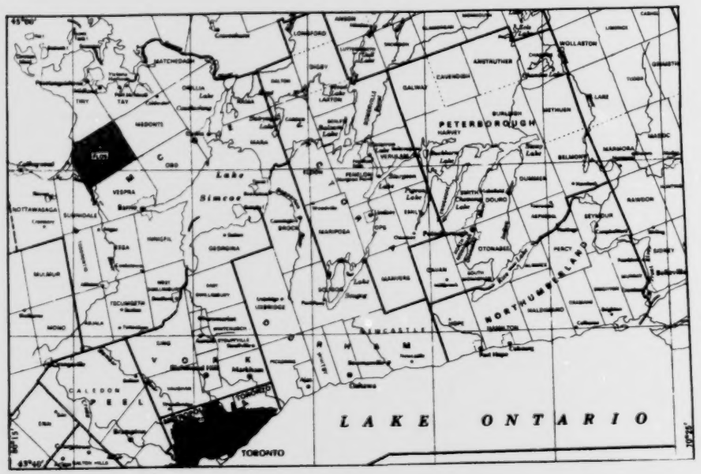

SYMBOLS

(Some symbols may not apply to this map.)

Geological and aggregate thickness boundary. Shading indicates deposit area.

Buried geological and aggregate thickness boundary. Shading indicates deposit area.

Municipal boundary.

2 Licenced property boundary; Property number: see Table 2.

DEPOSIT SYMBOL

Gravel Content — G 1 IC C-O — Geological Type

Thickness Class — Quality Indicator

Deposits are identified by Gravel Content, Thickness Class, Geological Type and Quality Indicator. Gravel content is expressed as a percentage of crushable aggregate material. (Crushable aggregate material is defined as unprocessed gravel containing a minimum of 35% coarse aggregate larger than the # 4 sieve, and also a minimum of 20% larger than 1 inch sieve.) Thickness class is based on potential aggregate tonnage per acre. Type refers to geologic origin. Quality indicator describes objectionable grain size and lithology.

Nottawasaga Bay

S 4 LB

G 3 LB 13

S 3 LB

S 2 LP

Langman

Crossland

Wasaga Beach

Marl Lake

TOWN OF WASAGA BEACH

CANADIAN NATIONAL

Fergusonvale

Dugouts

Auto Wrecker

12SG

14S

19

25S

56S

S 1 IC O

S 2 LP

26S

S 1 IC

Phelpston

10S

93S

7

8

9

10

S 2 LP 63S

S 4 OW

Apto

7 3G 75SC

FLOS TP

VESPRA TP

45S

730

G 1 OW C-O

G 2 OW

15

Hendrie

Allen Mills

12

11

48S

16

S 2 LP

S 2 LP

S 2 LP

S 4 LB

S 2 LP

S 4 LB

New Flos

SUNNIDALE TP

FLOS TP

NOTTAWASAGA R.

622

614

Vigo

Edenvale

S 2 LP

S 3 LB

17

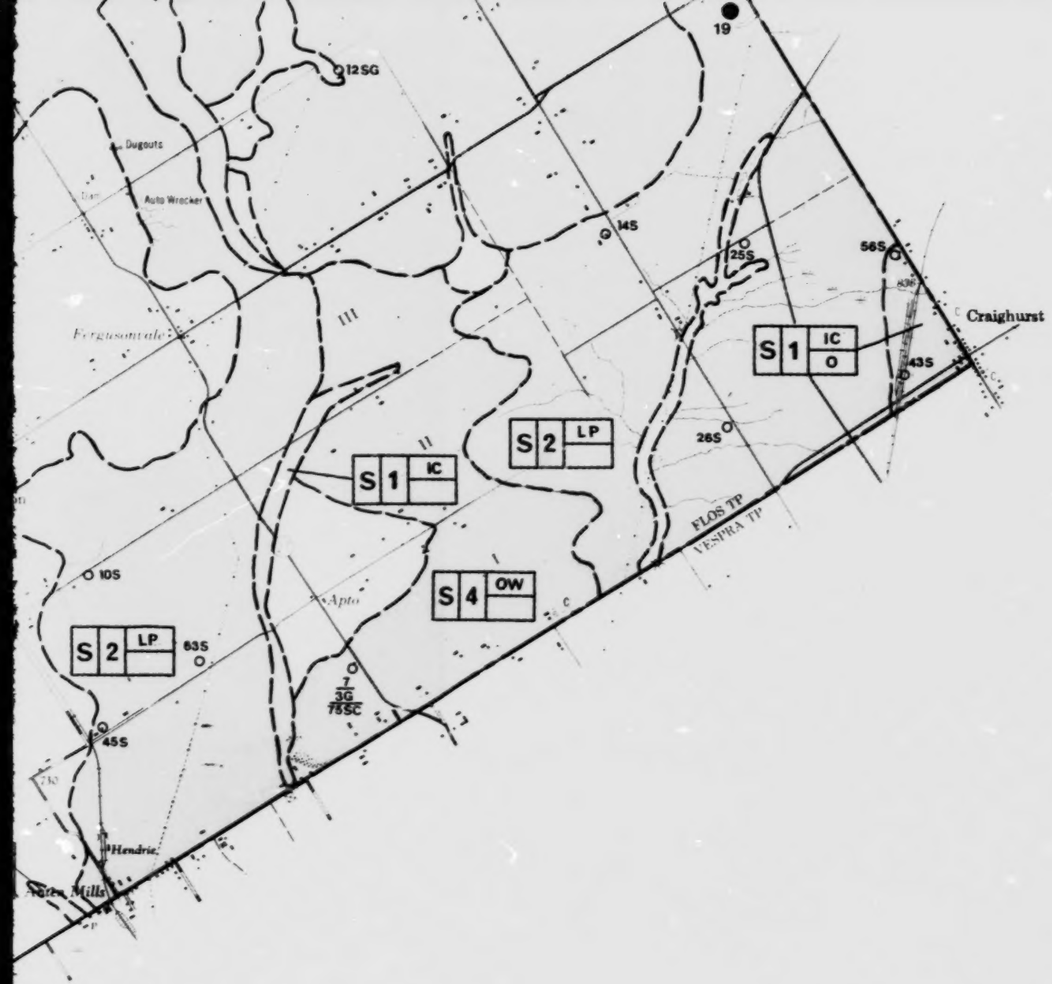

SYMBOLS

(Some symbols may not apply to this map.)

Geological and aggregate thickness boundary. Shading indicates deposit area.

Buried geological and aggregate thickness boundary. Shading indicates deposit area.

Municipal boundary.

2 — Licenced property boundary; Property number: see Table 2.

3 — Unlicenced sand or gravel pit*; Property number: see Table 2.
*Abandoned pit or wayside pit operating on demand under authority of a permit.

FL-TH-2 — Selected test hole location; Identification number: see Table 7.

6 / 23 G — Selected drilled water well location; reported thickness of material (in feet); reported type of material (number only - overburden, T - till, G - gravel, S - sand, C - clay, Bk - bedrock).

G 1 IC C·O — Deposit Symbol: see below.

Texture symbol: see below.

TEXTURE SYMBOL



The Texture Symbol provides quantitative assessment of the grain size distribution at a sampled location. The relative amounts of gravel, sand, silt and clay in the sampled material are shown graphically by the subdivision of a circle into proportional segments. The above example shows a hypothetical sample consisting of 45% gravel, 35% sand and 20% silt and clay.

DEPOSIT SYMBOL

Deposits are identified by Gravel Content, Thickness Class, Geological Type and Quality Indicator. Gravel content is expressed as a percentage of crushable aggregate material. (Crushable aggregate material is defined as unprocessed gravel containing a minimum of 35% coarse aggregate larger than the # 4 sieve, and also a minimum of 20% larger than 1 inch sieve.) Thickness class is based on potential aggregate tonnage per acre. Type refers to geologic origin. Quality indicator describes objectionable grain size and lithology.

Gravel Content

G	Greater than 35% gravel.
S	Less than 35% gravel.

Thickness Class

Class	Average Thickness in feet (metres)	Tons per acre (Tonnes per hectare)
1	greater than 20 (> 6)	greater than 50,000 (> 112 000)
2	10-20 (3-6)	25,000-50,000 (56 000 - 112 000)
3	5-10 (1.5-3)	12,500 - 25,000 (28 000 - 56 000)
4	less than 5 (< 1.5)	less than 12, 500 (< 28 000)

Geological Type

AL	Older Alluvium	**K**	Kame
E	Esker	**LB**	Lacustrine Beach
EM	End Moraine	**LD**	Lacustrine Delta
IC	Undifferentiated Ice-Contact Stratified Drift	**LP**	Lacustrine Plain
		OW	Outwash
ICT	Ice-Contact Terrace	**WD**	Windblown Forms

(see Appendix C for descriptions of Geological Types)

Quality Indicator

	If blank, no known limitations present.
C	Clay and/or silt (fines) present in objectionable quantities.
L	Deleterious lithologies present.
O	Oversize particles or fragments present in objectionable quantities.

SOURCES OF INFORMATION

Base map by Surveys and Mapping Branch, Ontario Ministry of Natural Resources.
Licence data from District and Regional Offices, Ontario Ministry of Natural Resources.
Aggregate suitability data from the Engineering Materials Office, Ontario Ministry of Transportation and Communications.
Test hole data from Aggregate Assessment Office, Ontario Geological Survey, Ontario Ministry of Natural Resources.
Selected drilled water well data from the Ontario Ministry of the Environment.
Drilling data from the Petroleum Resources Section, Ontario Ministry of Natural Resources.

Geology by: G. J. Burwasser and S.T. Boyd, 1974.
G. J. Burwasser and B. D. Cairns, 1974.
R.E. Deane, 1950.

Compilation and Drafting by: Staff of the Aggregate Assessment Office.

This map is to accompany O.G.S. Aggregate Resources Inventory Paper 56.

This map is published with the permission of E.G. Pye, Director, Ontario Geological Survey.
Issued 1982.

Information quoted for an individual test hole or pit refers to a specific sample or face. Care should be exercised in extrapolating such information to other parts of the deposit.

Waverley
Park
Orchard
Racetrack
Wharves
Wharf
Gravel Pit
Orr Lake
Sandy Bend
Foot Bridges
Saurin
TINY TP
FLOS TP
XI
Race Track
Sewage Disposal Bed
Dam
Elmvale
Sawmill
Sports Track
Allenwood
IX
VIII
VII
VI
V
IV
II
III
Hillsdale
MEDONTE TP
FLOS TP
Auto Wrecker
New Wasaga Beach
Nottawasaga Bay
Drive-in Theatre
Motel
Langman
Gravel Pit
Golf Range
Wasaga Beach
Crossland
CANADIAN NATIONAL
Dugouts
Dam
Fergusonvale
1
2
3
4
13
14
19
27
N

Ontario

Ministry of Natural Resources

Hon. Alan W. Pope
Minister

W.T. Foster
Deputy Minister

ONTARIO GEOLOGICAL SURVEY

AGGREGATE RESOURCES INVENTORY

FLOS TOWNSHIP

SIMCOE COUNTY

MAP 2
SELECTED SAND AND GRAVEL RESOURCE AREAS

Scale 1:50 000

Mile 1 0 1 Mile

Metres 1000 0 1 Kilometre

NTS Reference: 31 D/5 31 D/12

© OMNR-OGS 1982

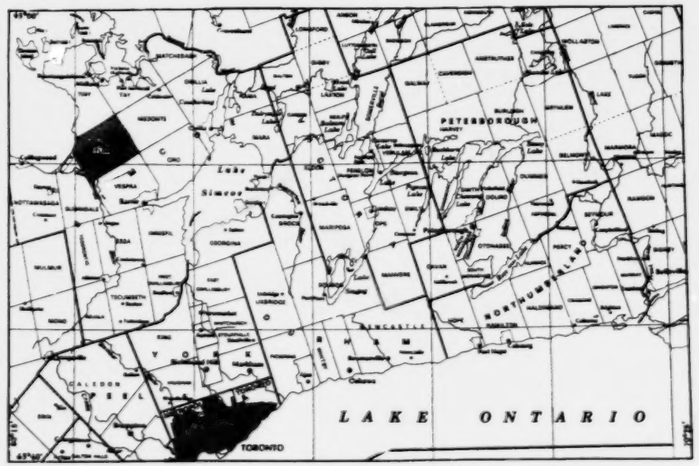

SYMBOLS

(Some symbols may not apply to this map.)

- Geological and aggregate thickness boundary.
- Buried geological and aggregate thickness boundary.
- Municipal boundary.
- Selected sand and gravel resource area; Primary significance; Deposit number: see Table 3.
- Selected sand and gravel resource area; Secondary

Nottawasaga Bay

Wasaga Beach

Langman

Crossland

Fergusonvale

Phelpston

Apto

Hendrie

Aspley Mills

Vigo

New Flos

Edenvale

Marl Lake

Marl Creek

Golf Course

Golf Range

Gravel Pit

Dump

Auto Wrecker

Dugouts

Dam

Greenhouse

TOWN OF WASAGA BEACH

CANADIAN NATIONAL

NOTTAWASAGA R.

FLOS TP

VESPRA TP

SUNNIDALE TP

730

622

614

I

II

III

IV

V

VI

1

2

3

4

5

6

7

8

9

10

11

12

13

14

15

16

17

18

19

SYMBOLS

(Some symbols may not apply to this map.)

Geological and aggregate thickness boundary.

Buried geological and aggregate thickness boundary.

Municipal boundary.

Selected sand and gravel resource area; Primary significance; Deposit number: see Table 3.

Selected sand and gravel resource area; Secondary significance.

Selected sand and gravel resource area; Tertiary significance.

2 — Licenced property boundary; Property number: see Table 2.

3 — Unlicenced sand or gravel pit*; Property number: see Table 2.
*Abandoned pit or wayside pit operating on demand under authority of a permit.

SOURCES OF INFORMATION

Base map by Surveys and Mapping Branch, Ontario Ministry of Natural Resources.

Licence data from District and Regional Offices, Ontario Ministry of Natural Resources.

Aggregate suitability data from the Engineering Materials Office, Ontario Ministry of Transportation and Communications.

Geology by: G. J. Burwasser and S.T. Boyd, 1974.
G. J. Burwasser and B. D. Cairns, 1974.
R.E. Deane, 1950.

Compilation and Drafting by: Staff of the Aggregate Assessment Office.

This map is to accompany O.G.S. Aggregate Resources Inventory Paper 56.

This map is published with the permission of E.G. Pye, Director, Ontario Geological Survey.
Issued 1982.

Waverley

Para

>202

Orchard

Racetrack

>144

Gravel Pits

Wharves

Wharf

Gravel Pit

Orr Lake

Sandy Bend

>119

BOBCAYGEON FORMATION
Upper & Middle Members

Saurin

TINY TP

FLOS TP

N1

Sewage Disposal Bed

Race Track

Dam

>263

Sports Field

Elmvale

>246

Allenwood

>207

>324

Hillsdale

MEDONTE TP

FLOS TP

>161

>203

Auto Wrecker

>82

BOBCAYGEON FORMATION
Upper & Middle Members

New Wasaga Beach

Nottawasaga Bay

>78

Drive-in Theatre

VERULAM FORMATION

Motel

>309

Dugouts

Dam

Auto Wrecker

>167

>160

Langman

Gravel Pit

Crossland

CANADIAN NATIONAL

Fergusonvale

Golf Range

Wasaga Beach

>85

>179

>85

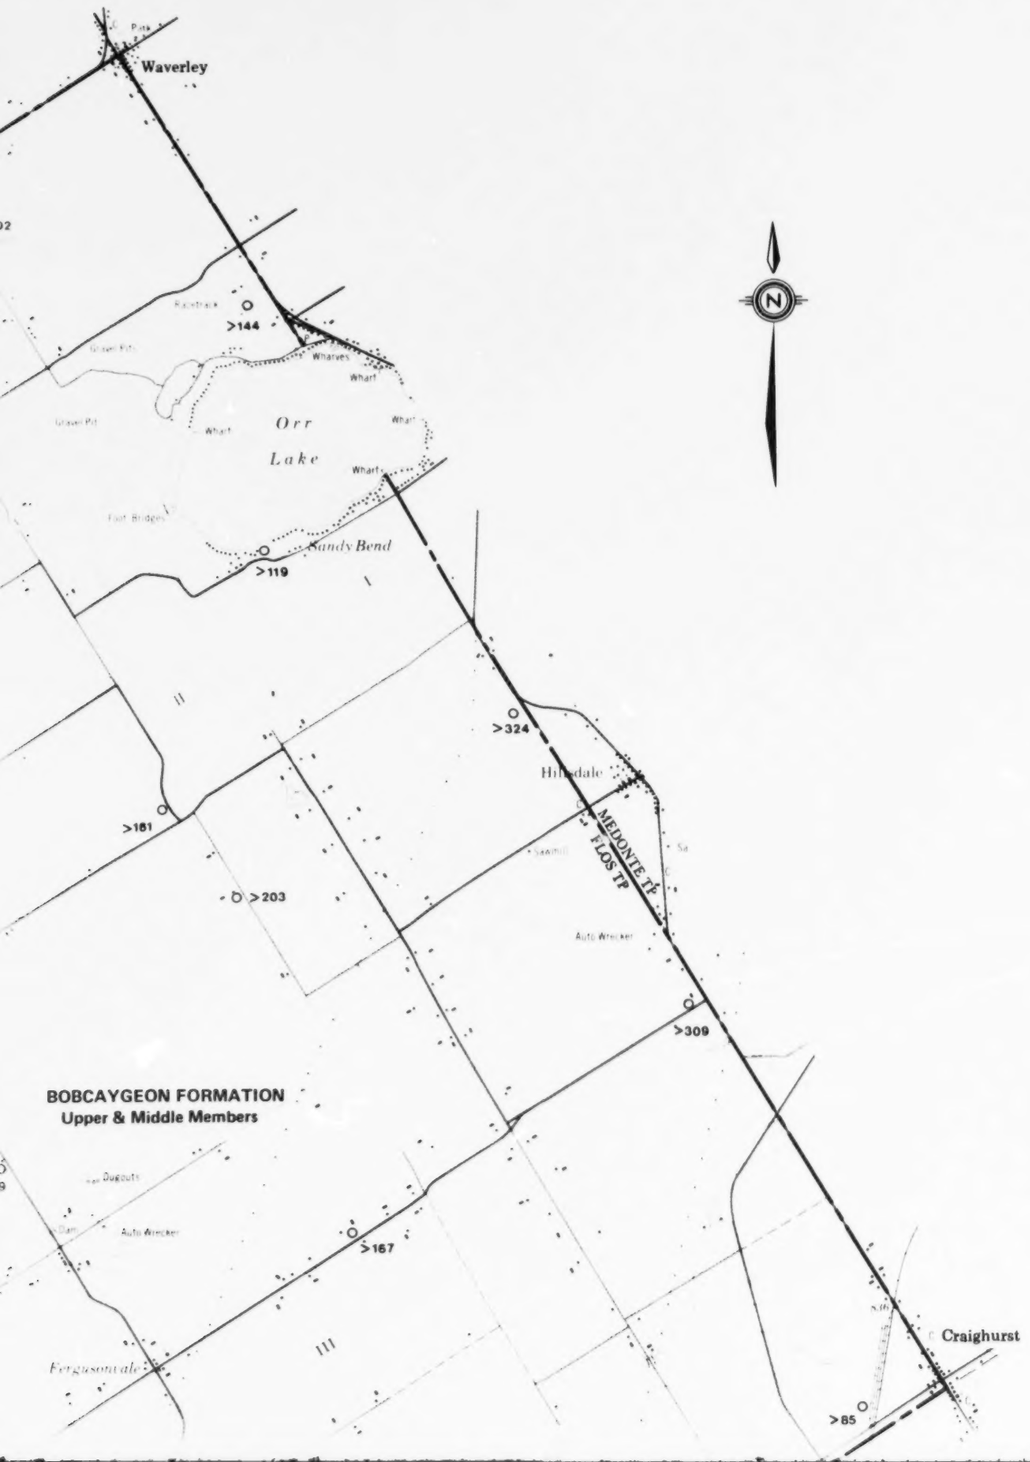

Ministry of Natural Resources
Ontario

Hon. Alan W. Pope
Minister

W.T. Foster
Deputy Minister

ONTARIO GEOLOGICAL SURVEY
AGGREGATE RESOURCES INVENTORY

FLOS TOWNSHIP
SIMCOE COUNTY

MAP 3
BEDROCK RESOURCES

Scale 1:50 000

Mile 1 0 1 Mile

Metres 1000 0 1 Kilometre

NTS Reference: 31 D/5 31 D/12

© OMNR-OGS 1982

LEGEND

PALEOZOIC

ORDOVICIAN

MIDDLE ORDOVICIAN

VERULAM FORMATION
Limestone

BOBCAYGEON FORMATION

SYMBOLS

(Some symbols may not apply to this map.)

— — — — Geological formation boundary.

- - - - - - - Geological formation member boundary.

—•—•— Formation thickness boundary (see text).

——25—— Drift thickness contour: 25 foot (8 m) interval.

—— - —— Municipal boundary.

(2) Selected bedrock resource area; Deposit number: see Table 6

Nottawasaga Bay

VERULAM FORMATION

BOBCAYGEON FORMATION
Upper & Middle Members

Langman

Crosshard

Wasaga Beach

Mari Lake

TOWN OF WASAGA BEACH

CANADIAN NATIONAL

Fergusonvale

Phelpston

Apto

Hendrie

Anten Mills

Vigo

New Flos

Edenvale

NOTTAWASAGA R.

FLOS TP

SUNNIDALE TP

VESPRA TP

>309
>160
>167
>179
>85
>140
>215
>93
>63
>140
659
730
>220
>156
>253
>138
>192
614
622

FLOS



LEGEND

PALEOZOIC

ORDOVICIAN

MIDDLE ORDOVICIAN

VERULAM FORMATION
Limestone

BOBCAYGEON FORMATION
Limestone

SYMBOLS

(Some symbols may not apply to this map.)

- Geological formation boundary.
- Geological formation member boundary.
- Formation thickness boundary (see text).
- 25 — Drift thickness contour: 25 foot (8 m) interval.
- Municipal boundary.
- (2) — Selected bedrock resource area; Deposit number: see Table 6.
- Bedrock exposed or near surface; covered by less than 3 feet (1 m) of overburden: see Table 4.
- Bedrock covered by 3 to 25 feet (1 to 8 m) of overburden: see Table 4.
- Bedrock covered by 25 to 50 feet (8 to 15 m) of overburden: see Table 4.
- x — Isolated bedrock outcrop.
- Q2 — Licenced quarry boundary; Property number: see Table 5.
- ● Q3 — Unlicenced quarry*; Property number: see Table 5. *Abandoned quarry or wayside quarry operating on demand under authority of a permit.
- O 28 — Selected drilled waterwell location; reported depth to bedrock (in feet).

SOURCES OF INFORMATION

Base map by Survey, and Mapping Branch, Ontario Ministry of Natural Resources.

Licence data from District and Regional Offices, Ontario Ministry of Natural Resources.

Aggregate suitability data from the Engineering Materials Office, Ontario Ministry of Transportation and Communications.

Selected drilled water well data from the Ontario Ministry of the Environment.

Drilling data from the Petroleum Resources Section, Ontario Ministry of Natural Resources.

Geology by: G. J. Burwasser and M. J. Ford, 1974 a, b, c, d.
B.A. Liberty, 1969.

Compilation and Drafting by: Staff of the Aggregate Assessment Office.

This map is to accompany O.G.S. Aggregate Resources Inventory Paper 56.

This map is published with the permission of E.G. Pye, Director, Ontario Geological Survey.

Issued 1982.